

512 Rec'd PCT/PTO 09 JUN 1999


Certificate of Mailing	
Date of Deposit <u>9 JUNE 99</u>	Label Number: <u>EL 3560895305</u>
I hereby certify under 37 CFR 1.10 that this correspondence is being deposited with the United States Postal Service as "Express Mail Post Office to Addressee" with sufficient postage on the date indicated above and is addressed to BOX PATENT APPLICATION, Assistant Commissioner of Patents, Washington, D.C. 20231.	
<u>SANDRA E MARXEN</u> Printed name of person mailing correspondence	<u>Sandra Marxen</u> Signature of person mailing correspondence

Substitute Form PTO 1390 U.S. Department of Commerce Patent and Trademark Office		Attorney's Docket Number: 50124/003001
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371		U.S. Application Number: Not Yet Known
INTERNATIONAL APPLICATION NUMBER	INTERNATIONAL FILING DATE	PRIORITY DATE CLAIMED
PCT/AU97/00818	2 Dec 1997	9 Dec 1996
TITLE OF INVENTION:	BICYCLE SEAT	
APPLICANTS FOR DO/EO/US:	Paul Nelson	
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:		
1.	<input checked="" type="checkbox"/>	This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.
2.	<input type="checkbox"/>	This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.
3.	<input checked="" type="checkbox"/>	This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4.	<input checked="" type="checkbox"/>	A proper Demand for International Preliminary Examination was made by the 19 <sup>th</sup> month from the earliest claimed priority date.
5.	<input type="checkbox"/>	A copy of the International Application as filed (35 U.S.C. 371(c)(2)).
a.	<input checked="" type="checkbox"/>	is transmitted herewith (required only if not transmitted by the International Bureau).
b.	<input type="checkbox"/>	has been transmitted by the International Bureau.
c.	<input type="checkbox"/>	Is not required, as the application was filed with the United States Receiving Office (RO/US).
6.	<input type="checkbox"/>	A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7.	<input type="checkbox"/>	Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
a.	<input type="checkbox"/>	are transmitted herewith (required only if not transmitted by the International Bureau).
b.	<input type="checkbox"/>	have been transmitted by the International Bureau.
c.	<input type="checkbox"/>	have not been made; however, the time limit for making such amendments has NOT expired.
d.	<input checked="" type="checkbox"/>	have not been made and will not be made.
8.	<input type="checkbox"/>	A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9.	<input checked="" type="checkbox"/>	An oath or declaration of the inventors (35 U.S.C. 371(c)(4)).

10.		A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).			
11.		An Information Disclosure Statement under 37 CFR 1.97 and 1.98.			
12.	X	An assignment for recording. A separate cover sheet in compliance with 37 3.28 and 3.31 is included.			
13.	X	A FIRST preliminary amendment.			
		A SECOND or SUBSEQUENT preliminary amendment.			
14.		A substitute specification.			
15.		A change of power of attorney and/or address letter.			
16.		Other items or information:			
17.		<p>The following fees are submitted:</p> <p>BASIC NATIONAL FEE (37 CFR 1.492(A)(1)-(5)):</p> <p>Search Report has been prepared by the EPO or JPO \$ 930.00</p> <p>International preliminary examination fee paid to USPTO (37 CFR 1.482) \$ 720.00</p> <p>No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$ 790.00</p> <p>Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$ 1070.00</p> <p>International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) \$ 98.00</p>			
		ENTER APPROPRIATE BASIC FEE AMOUNT =		\$	1070.00
		Surcharge of \$130 for furnishing the oath or declaration later than <input type="checkbox"/> 20 OR <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).		\$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	30 - 20 =	10	x \$22.00	\$	220.00
Independent claims	5- 3 =	2	x \$82.00	\$	164.00
Multiple dependent claims (if applicable)			+ \$270.00	\$	0.00
		TOTAL OF ABOVE CALCULATIONS =		\$	1454.00
		Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed with this request (Note 37 CFR 1.9, 1.27, 1.28).		\$	
		SUBTOTAL =		\$	1454.00
		Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 OR <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).		+	\$
		TOTAL NATIONAL FEE =		\$	1454.00
		Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property.		+	\$
		TOTAL FEES ENCLOSED =		\$	1494.00

09/319683

80 Rec'd PCT/PTO 09 JUN 1999

		Amount to be refunded	\$
		charged	\$
a.	X	A check in the amount of \$ 1494.00 to cover the above fees is enclosed.	
b.		Please charge my Deposit Account No. 03-2095 in the amount of \$ [**.]** to cover the above fees.	
c.	X	The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment, to Deposit Account No. 03-2095. A duplicate copy of this sheet is enclosed.	
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b) must be filed and granted to restore the application to pending status.			
SEND ALL CORRESPONDENCE TO:			
Paul T. Clark Clark & Elbing LLP 176 Federal Street Boston, MA 02110-2214  Telephone: 617-428-0200 Facsimile: 617-428-7045		 Signature  Paul T. Clark Reg No. 30,162	

\\Ceserver\documents\50124\50124.003001 Transmittal.wpd

Cancel figures 51-81.


REMARKS

Applicant cancels claims 1, 13-19, and 42-55. Applicant also cancels figures 51-81. None of the above amendments add new matter.

If there are any charges, or any credits, please apply them to Deposit Account No. 03-2095.

Respectfully submitted,

Date: June 8, 1999

  
Paul T. Clark  
Reg. No. 30,162

Clark & Elbing LLP  
176 Federal Street  
Boston, MA 02110  
Telephone: 617-428-0200  
Facsimile: 617-428-7045

\\Ceserver\documents\50124\50124.003001.Preliminary Amendment.wpd

66699 "E394T4B"

BICYCLE SEAT

This invention relates to a support system and in particular to a bicycle seat.

5

The present invention is an improvement or modification to the seat as disclosed in my international application PCT/AU96/00273 and my international application PCT/AU94/00284. The contents of these earlier international applications are incorporated into this specification by this reference.

10

This invention may be said, in the first aspect, to reside in a support system, including;

15

a first support portion and a second support portion for receiving a riders buttocks; and

and a hinge for allowing each of the first and second support portions to undergo independent arcuate movement having a component at least in a substantially vertical plane when the rider is seated on the support portions and performing a pedalling motion.

20

This invention may also be said, in the first aspect, to reside in a support system, including;

25

a first support portion and a second support portion for receiving a riders buttocks;

a front portion coupled to the first and second support portions; and

and a hinge between the first and second support portions and the front portion for allowing each of the first and second support portions to undergo substantially independent arcuate movement having a component at least in a substantially vertical plane when the rider is seated on the support portions and performing a pedalling motion.

30

35

According to this aspect of the invention the independent arcuate movement of the support portions provides both

Furthermore because of the movement of the support portions friction is reduced which in turn reduces chaffing.

15 Preferably the hinge comprises a first hinge between the first support portion and the front portion and a second between the second support portion and the front portion.

Preferably the support system includes an integral shell  
20 which includes the first and second support portions, the  
front portion and the hinge with the hinge being defined by  
a transition between the support portions and the front  
portion.

25 In the embodiment of the invention where the support system includes the integral shell, the integral shell including the hinge is preferably formed from a resilient plastics material such as nylon 6, 6 polycarbonate, polyethylene or the like so that the first and second support portions can  
30 move in the arcuate direction by flexure of the hinge and the resilient nature of the material will cause the first and second support portions to tend to return to their initial position as load is removed from them during pedalling motion.

35  
Preferably the shell is provided with upholstery which covers the shell.

10

15

20

25

30

35

first and second support portions, the first and second support portions each having a depression for



a raised portion between and forward of the

5 regions of a persons anatomy;

10 In this aspect of the invention the support is configured  
so that most of the riders weight will be centred on the  
ischial bones and buttock region of the rider and supported  
in the depressions of the first and second support  
portions. This therefore decreases the amount of  
15 compression of the users anatomy other than the vicinity of  
the ischial bones to increase comfort and prevent  
significant pressure from being applied to other portions  
of the buttocks outside the ischial region.

Preferably the first and second support portions and the front portion are integral with one another by being made as an integral shell.

30 A further aspect of the invention may be said to reside in  
a support system, including;

35           a soft collapsible upholstery member provided on  
the nose portion for extending the nose portion forwardly  
and/or upwardly with respect to the support portions.

collapsible member on the nose portion gives the seat the appearance of a conventional bicycle seat but nevertheless performs little or no vertical support function because of the collapsibility of the material when pressure is applied to it. This reduces pressure to the soft tissue of the nose section against a user when on the support system. The soft collapsible material provides a centring member so that a person can centre him or herself on the support portion relative to the truncated nose and the collapsible material and truncated nose may also provide some lateral support to assist centring and stability of a rider when seated on the support system.

The self collapsible material may be a foam or sponge material or polyurethane or the like.

20 Preferably the support portions and truncated nose are formed as a integral shell from plastics materials such as nylon 6,6 polycarbonate, polyethylene or like material.

The invention may also be said to reside in a bicycle seat, including:

25            "a unitary shell having a nose portion and a rear  
portion, the shell being formed from a flexible material;  
         a slot in the rear portion dividing the rear  
portion into two separate support portions; and  
         each of the support portions being independently  
30 movable relative to the nose portion and each other by  
flexure of the flexible material from which the shell is  
formed so that a transition between the two separate  
support portions and the nose portion forms a hinge  
allowing the two separate support portions to undergo  
35 substantially independently movement when a rider is seated  
on the bicycle seat and pedalling a bicycle.

Preferably the bicycle seat includes a cushioning skin over an upper surface of the unitary shell.

---

5 Preferably the shell has an upper surface and a lower surface, a plurality of ribs projecting from the lower surface.

10 Preferably a mounting rail is coupled to the lower surface of the shell.

In one embodiment of the invention, the mounting rail extends to a position below the support portions and a spring is arranged between the mounting rail and each support portion.

15 The spring may be a coil spring which is connected to the mounting rail and to the shell.

20 In other embodiments, the spring may be integral with the mounting rail and be defined by a curved or bent portion of the mounting rail.

25 Preferably the nose portion has an undercut for receiving a front portion of the mounting rail to secure the front portion of the mounting rail to the shell.

Preferably stop means is provided for limiting movement of the two support portions.

30 Preferably the stop means comprise end portions of the mounting bracket which are spaced from the lower surface of the shell.

35 A further aspect of the invention may be said to reside in a bicycle seat, including:  
a nose portion;

a rear support portion coupled to the nose  
portion, the rear support portion having first and second  
support portions;

5 a hinge for allowing each of the first and second  
support portions to undergo substantially independent  
movement relative to one another and the nose portion, the  
independent arcuate movement having a component at least in  
a substantially vertical plane when the rider is seated on  
the support portions and forming a pedalling motion; and  
10 stop means for limiting the amount of movement of  
the first and second support portions.

Preferably the bicycle seat includes a mounting rail for  
mounting the seat to a bicycle and the stop means comprises  
15 end portions of the mounting rail which are spaced from the  
first and second support portions and positioned below the  
first and second support portions.

The invention in a further aspect may be said to reside in  
20 a bicycle seat, including:

a nose portion;  
a rear portion for receiving a rider's buttocks;  
the nose portion and rear support portion having  
an upper surface and a lower surface;  
25 a mounting rail coupled to the lower surface;  
a cut-out in the nose portion for receiving a  
front portion of the mounting rail to hold the front  
portion of the mounting rail to the bicycle seat; and  
securing means for securing the mounting rail to  
30 the lower surface substantially at a middle portion of the  
lower surface so the rear portion is free and not connected  
to the mounting rail.

Preferably the securing means comprises a bracket and bolt  
35 and nut for clamping the mounting rail to the lower  
surface.

Preferably the bolt is embedded in the shell for receiving the nut and the bracket to couple the bracket and therefore the mounting rail to the bicycle seat.

- 5 In a further aspect, the invention may be said to reside in a support system including:

an inflatable housing which defines a chamber for receiving a fluid; and

- wherein when a user is supported by the support  
10 system and moves, fluid is caused to move from one part of the housing to another part of the housing so that the said one part can change its shape and/or form and the fluid flow to said another part causes the said another part to change its shape and/or form in response to the change in  
15 fluid in said another part of the housing.

- Thus, with the support system according to this aspect of the invention, when a user is supported by the support system and the user moves, fluid is caused to move from one  
20 part to another part to change the shape of the support system to facilitate support. In one embodiment the support system is a bicycle seat. In the case of a bicycle seat, as a user is pedalling, movement of the legs and buttocks during pedalling can place an increase in pressure  
25 on one part of the seat so that fluid is forced from that part to another part which has less pressure on it so that that part can expand so as to maintain some contact and support of the user notwithstanding the reduction in pressure applied by the user during riding. The fluid can  
30 basically move back and forward as the rider pedals to result in one part of the seat collapsing and then reinflating as the fluid moves back and forward during pedaling so that various parts of the seat collapse under the weight of the user or expand to maintain contact of the  
35 seat with the user and mimic movement of the user as the user pedals the bicycle.

Preferably the housing includes a fluid inlet in the  
~~housing for enabling fluid to enter the housing.~~

---

- 5 Preferably the housing includes rigid sections so that the  
general shape of the housing is maintained notwithstanding  
the fact that the housing is able to expand or collapse  
during movement of the user on the seat.

- 10 The housing may be a single chamber which changes form.  
However, preferably the housing includes two housing  
portions joined by a fluid passage so that when fluid  
passes from one part of the housing to the another part of  
the housing, the fluid passes through the fluid passage to  
thereby direct the fluid to particular parts of the housing  
15 for expansion of those parts of the housing. By selecting  
the position of the fluid passage, various parts of the  
housing can be made to expand more or less than others  
depending on the particular use of the seat or needs of a  
particular user.

- 20 Preferably the housing is made from elastomeric material  
such as rubber, elasticated plastic or like stretchable  
material to enable expansion and contraction of the housing  
as the fluid moves from one part of the housing to another  
25 part of the housing.

Preferably the seat has a base plate for supporting the  
housing.

- 30 Preferably the base plate has attachment means for  
attaching the seat to an article.

Preferably the attachment means comprises a pair of rails.

- 35 Preferably the seat is a bicycle seat but in other  
embodiments, the seat could be a lounge chair or like seat,  
or a medical application appliance such as a therapeutic or

rehabilitation or harness like appliance.

---

A still further aspect of the invention may be said to reside in a support system including:

- 5           a first portion;  
          a second portion;  
          the first and second portions being coupled to one another by spring material so that the first portion can move in response to a user's weight and/or pressure applied by a user when a user is supported by the support  
10           system and return as a user moves and reduces pressure and/or weight on that portion of the support system.

Thus, in this aspect of the invention, the support system  
15           is also able to generally follow the movement of the user's anatomy as the user moves on the support system.

Preferably the first portion of the support system includes two separate sections.

- 20           Preferably the first portion of the support system and the second portion of the support system are formed from spring material and the hinge is an integral part of the support system forming a transition between the first and second  
25           portions.

In another embodiment of the support system, the first and second portions may be formed from non-spring material and be coupled together by a hinge section formed from spring  
30           material.

A further aspect of the invention may be said to reside in a support system, including:

- an abutment portion within the support system;  
35           biasing means for biasing the abutment portion relative to the support system so that the abutment portion can move relative to the support system; and

the biasing means providing a floating support  
for the abutment portions so that the abutment portion can  
move relative to the support system against the bias of the  
biasing means in response to the weight or pressure of a  
5 user when supported by the support system.

The biasing means may comprise a pad or block of resilient  
material, a spring, or air, for biasing the abutment  
portion relative to the support system.

10

In one embodiment, the support system is a seat and  
includes a cover member for covering the seat surface  
portion and the abutment portion.

15 In one embodiment of the invention, the seat includes a  
single abutment portion which may be in the pubic area.  
However, in other embodiments, two or more abutment  
portions could be used. Furthermore, the abutment portion  
or abutment portions may be arranged at different positions  
20 on the seat to provide different support characteristics  
depending on the position at which the abutment portion is  
located.

In one embodiment of the invention, the abutment portions  
25 are disc-shaped and in the embodiment where the biasing  
means comprises air, the abutment members may be hollow  
members formed from elastic material to enable expansion of  
the abutment members so as to move the abutment portion  
relative to the seat surface portion, or alternatively the  
30 biasing means may be an inflatable chamber below the  
abutment portion.

The biasing means may also be in the form of an air spring.

35 In other embodiments, the abutment portions may be ramp-  
shaped so as to form an inclined abutment portion.



at least two separate chambers in the support system; and

This aspect of the invention enables the at least two chambers to be inflated by fluid to different degrees to provide different support characteristics at the location of the two chambers.

15           an inflatable abutment portion coupled to the  
support system;

25 This aspect of the invention enables an inflatable abutment portion to be inflated to provide an abutment for high performance racing or the like or to merely change the setting surface characteristics of the support system to suit a user. The fluid control means enables a certain amount of fluid to be supplied to the inflatable abutment

30 portion to either fully inflate the abutment portion so that the abutment portion effectively forms a generally rigid abutment portion or to partially inflate the abutment portion so that the abutment portion is able to move under the weight and/or pressure of a user and to follow the

35 change in contour of a user's anatomy as a user moves on the support system.

Preferably the fluid reservoir is coupled to the control means.

---

5 In the preferred embodiments of the invention, the fluid which is supplied to the housing or which is used to inflate the abutment portion(s) comprises air but in some embodiments of the invention if it is desired to minimise weight, a lighter gas such as helium could be utilised.

10 Once again, in the preferred embodiment, the support system is a bicycle seat.

15 In other embodiments, the gas may be some other gas applicable to particular types of fluid reservoirs such as carbon dioxide cartridges or the like, nitrogen or the reservoir may be a chamber manually inflated with air by a pump or the like.

20 A still further aspect of the invention provides a support system including:

a support portion; and

at least one abutment portion in the support portion, the abutment portion being a fluid chamber for containing a fluid.

25

Preferably the fluid chamber includes a fluid inlet and the fluid chamber is an inflatable chamber.

30 A still further aspect of the invention provides a support system including:

an abutment portion coupled to the support system;

fluid receiving means for moving the abutment portion relative to the support system; and

35

fluid control means for controlling the application of fluid to the fluid receiving means to provide a desired amount of movement of the abutment

~~position relative to the support portion.~~

5 way of example, with reference to the accompanying  
drawings, in which:

Figure 1 is top perspective of a bicycle seat embodying the invention;

Figure 2 is a side view of the seat of Figure 1;

10                    Figure 3 is a view along the line III-III of  
Figure 1;

Figure 4 is a view along the line IV-IV of Figure 1;

Figure 5 is a view along the line V-V of  
15 Figure 1;

Figure 6 is a view along the line VI-VI of Figure 1;

Figure 7 is a top perspective view of a bicycle seat according to a second embodiment of the invention;

20                    Figure 8 is a side view of the seat of Figure 7;

Figure 9 is a top perspective view of a bicycle seat according to a third embodiment of the invention;

Figure 10 is side view of the seat of Figure 9;

Figure 11 is a view along the line XI-XI of  
25 Figure 9;

Figure 12 is a view along the line XII-XII of Figure 9;

Figure 13 is a view along the line XIII-XIII of Figure 9;

30            Figure 14 is a view along the line XIV-XIV of  
Figure 9;

Figures 15, 16, 17, 18, 19, 20, 21 and 22 are views various mounting rails for connecting the bicycle seat of the preferred embodiments to a bicycle;

35           Figure 23 is a plan view of a further embodiment  
of the invention;

Figure 24 is a front view of the embodiment of  
Figure 23;

---

Figure 25 is a rear view of the embodiment of  
Figure 23;

5           Figure 26 is an underneath view of the embodiment  
of Figure 23;

Figure 27 is a view along the line A-A of  
Figure 23;

10           Figure 28 is a view along the line B-B of  
Figure 23;

Figure 29 is a view along the line C-C of  
Figure 23;

Figure 30 is a side view of the embodiment of  
Figure 23;

15           Figure 31 is a view along the line D-D of  
Figure 23;

Figure 32 is a view along the line E-E of  
Figure 23;

20           Figure 33 is a view along the line F-F of  
Figure 23;

Figure 34 is a perspective view of a mounting  
raised used in the embodiment of Figure 23;

Figure 35 is a front view of the mounting rail of  
Figure 34;

25           Figure 36 is a side view of the mounting rail of  
Figure 34;

Figure 37 is a view of a further embodiment of  
the invention;

30           Figure 38 is a side view of the embodiment of  
Figure 37 with an additional modification shown;

Figure 39 is an underneath view of the embodiment  
of Figure 37;

Figure 40 is a rear view of the embodiment of  
Figure 37;

35           Figure 41 is a side view of a further embodiment;

Figure 42 is a rear view of a still further  
embodiment;

Figure 43 is a view of a bicycle seat according to a first embodiment of the invention;

---

Figure 44 is a view of the seat of Figure 43 taking up a different configuration;

5           Figure 45 is a view of a further embodiment of the invention;

Figure 46 shows a further embodiment of the invention;

10           Figure 47 is a view of a still further embodiment of the invention;

Figure 48 is a side view of the embodiment of Figure 47;

Figure 49 is a plan view of the embodiment of Figure 47 in a different configuration;

15           Figure 50 is a side perspective view of the embodiments of Figure 47;

Figure 51 is a plan view of a bicycle seat according to a further embodiment of the invention;

20           Figure 52 is a plan view of yet a further embodiment;

Figure 53 is a view of a further embodiment of the invention;

Figure 54 is a side view of the embodiment of Figure 51;

25           Figure 55 is a side view according to a different embodiment;

Figure 56 is a detailed view of part of the embodiment of Figure 51;

30           Figures 57 to 59 show alternative structures to the arrangement shown in Figure 56;

Figure 60 shows a modification to the embodiment of Figure 59;

Figure 61 shows a further alternative to the arrangement shown in Figure 60;

35           Figure 62 shows the arrangement of Figure 61 in a fully inflated condition;

Figure 63 shows yet a further embodiment of the

invention;

Figure 64 shows yet a further embodiment of the  
invention;

Figure 65 shows a still further embodiment of the  
5 invention;

Figures 66 to 76 show various modifications in  
the embodiment of Figure 65 applicable to bicycle seats;

Figure 77 shows part of the embodiments of  
Figures 65 to 76;

10 Figure 78 is an alternative to the embodiment  
shown in Figure 77;

Figure 79 shows part of the embodiments of  
Figures 65 to 76;

15 Figure 80 is a view along the line A-A of Figure  
79; and

Figure 81 shows a view of the arrangement of  
Figure 78 in a connected condition.

With reference to Figures 1 and 6, a bicycle seat 10 is  
20 shown which has an integral shell 11 including first and  
second support portions 12 and 14 which are separated by a  
longitudinal slot 16. The shell 11 also has a front  
portion 18 which forms a nose of the seat 10 and which is  
integrally coupled to the support portions 12 and 14.

25 The nose 18 and support portions 12 and 14 are coupled  
together by first and second hinges 20 and 22 which are  
also integral with the nose 18 and support portions 12 and  
14 and which are formed by a transition between the nose 18  
30 and support portions 12 and 14.

The shell 11 may be covered by upholstery 25 (see Figures  
3, 4, 5 and 6) which is formed from conventional padding  
material.

35 In the preferred embodiment of the invention where the  
hinges 20 and 22 are integral with the remainder of the

shell 11, the shell is formed from a flexible material, for example, plastics material such as nylon 6,6 polycarbonate or polyethylene so that the combined effect of the slot 16 and the transition from the nose portion 18 to the support portions 12 and 14 allows flexing movement of the support portions 12 and 14 about the hinges 20 and 22 relative to the front portion 18. However, in other embodiments the hinges 20 and 22 could be formed from suitable flexible material which is connected to separate front portion 18 and support portions 12 and 14 which, in turn, are formed from rigid material. Further still, in other embodiments rather than providing the slot 16 a thin narrow longitudinal hinge line (not shown) may be provided between the portions 12 and 14 so that the portions 12 and 14 are effectively formed as a single member with the portions 12 and 14 being able to move independently with respect to one another about the longitudinal hinge which joins the support portions 12 and 14.

The support portions 12 and 14 are a mirror image with respect to one another and, as will be evident from the cross-sectional views forming Figures 3 to 6, have a depression or recess 30 so that they are generally cupped shaped in configuration so as to snugly receive a portion of a riders buttocks adjacent the ischial bones. As is also apparent in Figure 2 the portions 12 and 14 incline upwardly slightly relative to the front portion 18.

The support portions 12 and 14 may also be provided on the underside of the shell 11 with a plurality of integral ribs 27 which extend from a rear end of the support portions 12 and 14 to a position rearwardly of the hinges 20 and 22 as can be clearly seen in Figures 3 and 4.

As is best seen in Figures 3 to 6 the portions 12 and 14 (only the portion 12 being shown in Figures 3 and 4) have a rim 32 which surrounds the depressions or recesses 30. The

rim 32 has a downwardly curved outer edge 33. As also  
shown in Figure 2 a connecting rail 40 is coupled to the  
seat 10. The rail 40 is connected between the hinges 20  
and 22 and front end 42 of the nose 18 so that the rail 40  
5 is confined to the nose 18 and does not interfere with  
movement of the hinge 22 or support portions 12 and 14.  
Thus, when the rail 40 is coupled to a bicycle to secure  
the seat 10 to the bicycle (in a manner which is known) the  
front portion 18 is held substantially still and the  
10 support portions 12 and 14 are able to move by flexing  
movement of hinges 20 and 22 relative to the front portion  
18.

As is best shown in Figure 4 the shell 11 may be provided  
15 with an enlarged thickness portion 50 just forward of the  
hinges 20 and 22 and also an enlarged thickness portion 52  
at the front end 42 of the nose 18. The enlarged thickness  
areas 50 and 52 can provide bosses for receiving the rails  
40 to secure the rails 40 to the shell 11. Preferred  
20 methods of connecting the rails 40 to the shell 11 will be  
described in more detail hereinafter with reference to  
Figures 15 to 22.

As is best shown in Figure 6 the nose 18 is preferably of  
25 inverted U-shape in cross-section and forms a raised  
portion 19 between the depressions or recesses 30 of the  
support portions 12 and 14. As best shown in Figures 12  
and 4 the nose 18 is angled downwardly from the hinges 20  
and 22.

30 When a rider is seated on the bicycle seat of Figures 1 to  
6 and commences pedalling motion the movement of the  
buttocks of the rider during pedalling will cause general  
oscillating movement of the support portions 12 and 14  
35 about hinges 20 and 22 independently of one another so that  
the portions 12 and 14 move in an arcuate manner as shown  
by arrow A in Figure 2. The arcuate movement is mainly in



a substantially vertical plane which is parallel to the longitudinal axis of the bicycle so that the arcuate movement has a major component in that vertical plane. However, some lateral movement of the portions 12 and 14 may also take place as shown by arrows B in Figure 5 so that the arcuate movement also has a component in a generally vertically plane which is perpendicular to the longitudinal axis of the bicycle. Thus, the arcuate movement in the vertical plane which is perpendicular to the axis of the bicycle is generally a minor component movement compared to the arcuate movement which is in the plane parallel to the longitudinal axis of the bicycle.

The arcuate movement of the support portions 12 and 14 provides comfortable support for the rider as the rider pedals the bicycle and also some energy return back into the users body due to the generally spring action or flexing provided by the hinges 20 and 22 which tends to return the portions 12 and 14 to their starting position as the rider moves. Thus, the rider is comfortably supported in an energy sufficient manner for pedalling of the bicycle.

In the embodiments of Figures 1 to 6 the seat 10 has the appearance of a generally conventional long nosed bicycle seat apart from the slot 16. If the slot 16 is covered by the upholstery material the seated embodiments of Figures 1 to 6 would, for intense purposes, look like any conventional long nosed leather bicycle seat but with a downwardly curved nose.

The embodiment of the invention shown in Figures 7 and 8 has the same general appearance as the embodiment of Figures 1 to 6 and is structured identically to Figures 1 to 6 except that the front portion 18 of the shell 11 is in the form of a truncated nose 18 which is much shorter than the nose 18 in the embodiments of Figures 1 to 6. In the

embodiments of Figures 7 and 8 the upholstery 25a is much thicker in the front portion 21 of the seat 10 and

effectively extends the length of the front 21 so that the front portion 21 has the same appearance as the nose 18 in  
5 Figures 1 to 6. However, the upholstery 25a which is in the vicinity of the nose 18 and extends the length of the front portion 21 in the embodiment of Figures 7 and 8 is of a very soft material such as soft foam or sponge material, "nerf" type material, polyethylene or like material so that  
10 it will readily collapse as soon as the user places any weight on it at all. Thus, the front portion 21 in embodiments of Figures 7 and 8 provides little or no support in the vertical direction and therefore reduces the pressure of the soft tissue of a rider when pedalling. The  
15 purpose of the soft upholstery portion 25a in the embodiments 7 and 8 gives the appearance of a conventional seat whilst at the same time reducing the support function of the nose 18 and also therefore reduces pressure to soft tissue.

20 The front portion 21 in the embodiment of Figures 7 and 8 does provide some centring datum so that the rider can properly centre himself on the support portions 12 and 14 relative to the front portion 21 and also provide some  
25 lateral stability for the rider when seated on the seat and during cornering. Nevertheless, the general support provided by the front portion 21 in the embodiments of Figures 7 and 8 is intended to be considerably less than that provided in the previous embodiment and the very soft  
30 upholstery material 25a is intended to collapse when weight is applied to it so as to basically form no load bearing function thereby reducing any chaffing which the nose portion of a bicycle seat normally produces.

35 Apart from the inclusion of the truncated nose section 18 and the relatively thicker yet softer upholstery material 25a in the front portion 21 the bicycle seat of Figures 7

and 8 functions in exactly the same manner as that of Figures 1 to 6.

---

Figures 9 and 10 show a third embodiment of the invention which is also similar to Figures 1 to 6 except that in this embodiment the front portion 18 is in the form of a truncated nose 18 substantially identical to that of Figures 7 and 8. However, in this embodiment the elongated soft upholstery material of Figures 7 and 8 is not provided so that the seat has the appearance of a very short nosed seat as is evident from Figures 9 and 10.

As is shown in Figures 11 to 14 upholstery material 25 is provided and generally follows the contour of the shell 11 of Figures 9 and 10 similar to the upholstery 25 in Figures 1 to 6.

In the embodiments of Figures 9 to 14 the ribs 27 run the entire length of the shell 11 from rear 55 to front end 42 and the support portion 12 and 14 are slightly wide then in the embodiment of Figures 1 to 6.

The hinges 20 and 22 at support portion 12 and 14 of the embodiment of Figures 9 to 14 operates in precisely the same manner as in the embodiment of Figures 1 to 6.

Figures 15 to 22 show preferred ways of coupling the mounting rails 40 to the shell 11 of the bicycle seat 10. In Figure 15 a plate 70 is provided and rails 40 are connected to the plate 70. The plate 70 can be bolted or glued to shell 11 or can be embedded in the shell 11 between the hinges 20 and 22 and the front 42 of the nose 18 during moulding of the shell 11.

Figure 16 shows a slightly different configuration of the rails 40 in which the rails 40 are formed from a single piece having a U-shaped transition 41. The ends of the

rails 40 are provided with circular plates 43 which can be embedded in the shell 11 when the shell is moulded.

---

Figure 17 shows an embodiment similar to that shown in  
5 Figures 3 and 4 where the rails 40 have laterally  
projecting ends 47 which are received in the thickened  
portions 50. The ends 47 may be embedded in the thickened  
portions 50 when the shell 11 is moulded or alternatively  
10 holes may be provided in the thickened portions 50 for  
receiving the ends 47. The U-shaped transition 41 can be  
received in a slot in portion 52.

The distance between the thickened portions 50 and 52 and  
the size of the rails 40 may be such that when the rails 40  
15 are located in place they are placed under slight tension  
to securely maintain the rails 40 in place on the shell 11.

Figure 18 shows an embodiment in which the nose 18 has  
moulded to it two generally cylindrical bosses 59 which are  
20 provided with holes 61 for receiving the ends 47 of the  
rails 40. The transition 41 of the rails may be received  
in slot 74 at the front 42 of the nose 18.

Figure 19 is a side view of the nose 18 and rails 40  
25 according to the embodiment of Figure 18 more clearly  
showing the location of the transition portion 41 in the  
slot 74. In this embodiment a fastener 75 may be located  
through a return portion 18' of the nose 18 to securely  
hold the transition portion 41 of the rails 40 in place in  
30 the slot 74.

Figure 20 merely shows a different embodiment of the rail  
40 wherein the rail is provided with ends 47' which are  
turned inwardly in the opposite direction to the direction  
35 of the ends 47 in Figures 17, 18 and 19. In this  
embodiment the transition portion 41 is square in shape  
rather than U-shaped as in the earlier embodiments. The

legs 47' could be embedded in the shell 11 during the moulding.

---

Figure 21 shows a further embodiment in which a stud 80 can  
5 be embedded in the shell 11 when the shell 11 is formed.  
The stud 80 has a sleeve 82 having screw threads 83. Stud  
80 also has a base 85 which has prongs 87 which embed in  
the shell 11 to securely locate the stud in place. The  
rails 40 are provided with screw threads 40' on a free end  
10 thereof which screw into the screw threads 83 in the  
sleeves 82.

Figure 22 shows a further embodiment in which the rails 40  
are formed integrally with the nose 18 from the same  
15 material as the nose 18. In this embodiment the rails 40  
have integral legs 65 which extend between the rails 40  
and the nose 18 to couple the rails to the shell 11.

The embodiment of figure 1 is a sleeker design for more  
20 high performance applications and may be relatively light  
whereas figure 9 is designed more for additional lateral  
width for recreational purposes.

Figures 23 to 36 show a fourth embodiment of the invention  
25 in which like reference numerals indicate like parts to  
those previously described.

As in the previous embodiments the seat is formed from a  
shell 11 of resilient material such as injection moulded  
30 plastics material, for example, nylon 6,6 or polypropylene.  
An upholstery 25 may be provided over the upper surface 11a  
of the shell 11 as will be described in more detail  
hereinafter.

35 The shell 11 has rear buttock support portions 12 and 14  
separated by a slot 16 and a front nose portion 18. Once  
again an integral hinge is formed in the regions 20 and 22

between the support portions 12 and 14 and the nose 18 so that the support portions 12 and 14 can undergo independent arcuate movement relative to one another and also the nose section 18 in the same manner as has been previously described.

The support portions 12 and 14 are slightly dish-shaped in the areas 30 and rise upwardly to the portion 19 and also upper peripheral edge 110 which delimits the rear support portions 12 and 14. The contouring will be more fully described and apparent from the cross-sectional drawings which will be described hereinafter.

As is clear from Figures 24 and 25 the shell 11 also includes a downwardly projecting skirt portion 112 which extends about the periphery of the seat from upper peripheral edge 110 to lower extremity 132. The skirt portion 112 is of greatest height at the side of the seat as shown in Figures 29 and 31, slightly of less height at the rear as shown in Figure 32 and of lowermost height at the front portion of the nose 18 as shown in Figure 31.

As is apparent from Figures 25 and 26 the lower surface 11b of the shell 11 has downwardly projecting ribs 114. The ribs 114 are of generally curved contour and outermost rib 114' (see Figure 26) is somewhat longer than the middle rib 114'' which, in turn, is somewhat longer than the innermost rib 114''' of each of the support sections 12 and 14.

As shown in Figure 26 mounting rail 40 is secured to the lower surface 11b by a nut 116 and bracket 118. A bolt 117 is embedded in the shell 11 for receiving the nut 116 (as best seen in Figure 31). The shell 11 has a cut-out 120 which receives a front portion 122 of the rail 40 as will be described in more detail hereinafter to secure the front portion 122 of the rail 40 to the shell 11.

The bracket 118 clamps the rail 40 to the lower surface 11b of the shell 11. The bracket 118 may have curved sections 126 for accommodating the rail 40 and securely fastening the rail 40 to the shell 11. The lower surface 11b of the shell may also have guide projections or groove 145a (Figure 28) for correctly positioning the rail 40. The rail 40 will be more fully described with reference to Figures 34 to 36.

Figures 27 to 29 are cross-sectional views across the seat of Figure 23 showing the curvature of the nose portion 18 and the support portions 12 and 14 in a direction transverse to the longitudinal direction of the seat and the bicycle upon which the seat will be used.

As can be clearly seen from Figures 27, 28 and 29 the lower extremity 132 of the shell 11 is formed with a step 130 on the lower surface 11b. Step 130 accommodates the upholstery material 25 so that the upholstery material can wrap around the bottom extremity 132 (see Figure 28) of the shell 11 and still remain flush with the lower surface 11b of the shell 11. This assists in securing the upholstery 25 to the shell 11 by increasing the surface area and also prevents the likelihood of any contact beneath the seat rolling the upholstery from the lower extremity 132 as would more likely be the case if the upholstery 25 is not flush with the lower surface 11b of the shell 11.

The upholstery 25 is preferably formed by a self-skinning polyurethane which in a moulding process adheres or otherwise connects onto the shell 11, foams into the desired moulded shape and provides cushioning for the bicycle seat. The outer surface of the polyurethane upholstery 25 forms a firm skin formed with any desired texture. The moulding of the shell 11 and the upholstery 25 can therefore be formed in a single operation. Alternatively, upholstery 25 can be formed separately and

connected to the shell 11 in a separate operation.

~~Furtherstill, the application of the upholstery can be a~~  
combination of the two processes, for example, the  
cushioning can be formed in the moulding process and a  
5 outer cover or skin can be adhered onto the moulded  
cushioning to complete the upholstery 25. Apart from  
adhering the upholstery 25 to the shell 11 in a moulding  
operation or by a separate adhesive process, the upholstery  
25 can be stapled onto the shell or otherwise fixed to the  
10 shell 11.

Figure 29 also shows a thickened region 147 arranged  
directly above the rear portions 145 of the rails 40 which  
form the stop members, the thickened portions 147 are  
15 slightly angled as shown in Figure 29 and provide a  
reinforced area on the lower surface 11b of the shell 11 so  
that when the seat bottoms out and contacts the end  
portions 145, the thickened areas 147 provide added  
strength to resist any tendency for fracturing of the shell  
20 11 and wearing through of the shell 11 due to contact  
between the lower surface 11b and the end portions 145.  
Generally the thickened areas 147 are in the form of a  
strip which follows the end portions 145 and arranged  
directly above the end portions 145 as shown in Figure 29.

25 Figure 30 shows a side view of the seat and as apparent  
from Figure 30 the seat is normally positioned in a  
slightly inclined position. The rail 40 has a connection  
section 141 which will couple to a clamp assembly on a  
30 bicycle so as to connect the seat to the bicycle. The  
clamp assembly allows for some arcuate adjustment of the  
seat so that the angle and position of the seat can be  
adjusted from that shown in Figure 30 between a more  
inclined position and a less inclined position depending on  
35 the rider's requirement. Generally a more inclined  
position will be used for high performance riding such as



racing and a lower incline will be used for more recreational and comfortable riding.

---

Figure 30 also shows the seat mounted on a bicycle generally designated by the reference numeral 200. The bicycle 200 includes a frame 201 having a sleeve or hollow socket 203, a central frame member 204 and a downwardly inclined and rearwardly extending frame member 205. Other frame components and parts of the bicycle are not shown in Figure 30. The sleeve 203 receives in telescopic fashion, a support post 207 which can be locked in position by a nut and bolt 209 which clamps a flange portion 211 of the sleeve 203 to clamp the sleeve 203 about the post 207. The post 207 carries a clamp assembly 209 which engages the rails 40 at the portions 141. The clamp assembly 209 is clamped in position and seats on a cup-shaped support portion 210 at the top of the post 207. A bolt 212 and nut 213 pass through the portion 210 and the clamp 209 to clamp the clamp 209 to the rails 40 and also to locate the clamp portion 209 on the portion 210. By loosening the bolt 212, the rails 40 can be moved back and forward in the direction of double headed arrow H within the clamp 209 and the clamp 209 can be pivoted slightly on surface 215 of cup-shaped portion 210 to position the seat 10 shown in Figure 30 in the desired orientation relative to the bicycle frame 201.

Figures 31 to 33 are cross-sectional views along the lines D-D, E-E and F-F respectively and show the contour of the nose portion 18 and support portions 12 and 14 in the direction of the longitudinal axis of the seat and bicycle upon which the seat is to be used.

Figure 31 shows bolt 117 embedded in hole 124 in the shell 11 which receives the nut 116 to retain the bracket 118 in clamping engagement with the rail 40 to secure the rail 40 to the shell 11. Figure 31 also shows that the nose section 18 of the shell includes the undercut 120 which is

in the form of a slot or a socket for receiving front  
~~portion 122 of the rail 40. Thus, the front 122 of the~~  
rail 40 is securely held in the undercut 120 and the rear  
portion of the rail 40 is secured to the shell 11 by the  
5 bracket 118 so that the rail 40 is securely held to the  
shell 11 for mounting onto a bicycle.

Figures 32 and 33 show the dish-shaped contouring of the  
portion 12 and the fact that the contour rises upwardly to  
10 the upper periphery 110 of that portion. The raised  
portion 19 is also clearly shown.

As is show in Figures 32 and 33 the mounting bracket 40 has  
rearwardly extending free end sections 145 which are spaced  
15 from the lower surface 11b of the shell 11. The rear  
portions 145 form stop members which limit the amount of  
flexing movement of the portions 12 and 14 relative to one  
another and the nose 18 so that if a rider is pedalling the  
bicycle and severely high load is applied to the portions  
20 12 and 14, such as may occur if going over bumps or the  
like, which would otherwise cause the portions 12 and 14 to  
flex about their hinges 20 and 22 to such a degree where  
the seat may be permanently distorted or broken, the end  
portions 145 will contact the lower surface 11b adjacent  
25 the portions 12 and 14 to limit the amount of movement of  
the portions 12 and 14 to prevent permanent distortion or  
breaking of the seat. The end portions 145 being spaced  
from the lower surface 11b of the shell 11 is also clearly  
shown in Figure 29. Thus, with reference to Figure 29,  
30 downward movement of the portions 12 and 14 in the  
direction of arrow M in Figure 29 will be limited by the  
end portions 145. The spacing between the end portions 145  
and the lower surface 11b will be dependent on the amount  
of movement required of the portions 12 and 14 and the  
35 material from which those portions are made.

As in the earlier embodiments the dish-shaped depressions  
~~30 are contoured to receive the ischial region of the~~  
anatomy where a majority of the rider's weight will be  
supported. The nose portion 18 is not intended to bear  
5 much, if any weight and normally sweeps downwards from the  
raised portion 19. The nose 18 can act to give a centring  
and stabilising effect by contact with the inner thighs,  
for example, when cornering. The ribs 114 can be  
positioned to control the amount of flex about the hinges  
10 20 and 22 formed by the transition of the shell 11 from the  
support portions 12 and 14 to the nose portion 18.  
Increasing the length and size of the ribs will tend to  
increase stiffness and therefore decrease the amount of  
flexing movement provided by the hinges 20 and 22.  
15 Furthermore, by altering the direction of the ribs 114  
relative to the longitudinal axis of the bicycle and the  
seat the nature or the arcuate movement of the support  
portions 12 and 14 can change from an arcuate movement  
generally in a plane parallel to the longitudinal axis of  
20 the seat and the bicycle upon which the seat is mounted to  
arcuate movement in a more lateral direction in a plane  
transverse with respect to the longitudinal axis of the  
seat and bicycle upon which the seat is mounted. The flex  
is also determined by the shell design and the material of  
25 the shell. Stiffer seats may be used for racing to provide  
quicker energy return by the flexing movement of the  
portions 12 and 14 and more flexible seats can be used for  
recreational use to increase comfort. The direction of the  
flex also depends on the use. The arcuate movement may be  
30 more linear (that is, in the longitudinal direction of the  
seat and bicycle) for racing whilst for recreational use it  
may be more lateral, (that is, in a plane transverse to the  
longitudinal axis of the seat).  
35 The seat may be used without the upholstery 25 in which  
case the shell 11 is preferably provided with a textured  
finish on the upper surface 11a to prevent slippage.

As previously mentioned, the shell 11 is formed most preferably by injection moulding and plastics additives such as glass fibre or the like can be added to stiffen the seat or otherwise alter the characteristics of the arcuate movement of the portions 12 and 14.

Figures 34 to 36 show the rail 40 in more detail.

- 10 As shown in Figures 34 to 35 the rail 40 includes the front portion 122 which is received in the undercut 120 of the shell 11. The front portion 122 is generally semicircular and a pair of downwardly and outwardly curved transition sections 151 which extend from the front portion 122. A
- 15 pair of parallel connecting rails 141 extend from the transition sections 151 rearwardly to upwardly extending sections 153. The pair of upwardly extending sections 153 extend into a pair of rearwardly and slightly upwardly inclined sections 157 and those sections extend into
- 20 outwardly extending sections 159 which, in turn, extend into the end sections 145 which form the stop members. Alternatively the sections 159 and 145 could form a continuously curved profile.
- 25 The rail portions 141 are the portions of the mounting rail 40 which couple onto a clamp arrangement of a bicycle to secure the seat to the bicycle.

The sections 157 form abutment sections which abut the lower side 11b of the shell 11 and which are engaged by the clamp bracket 118 to secure the rear portion of the mounting rail 40 to the shell 11 as has been described.

Figures 37, 38 and 39 show a further embodiment of the invention which is similar to the seat described with reference to Figures 23 to 35. The seat includes an integral shell 11 which is formed in the same manner as the

above mentioned embodiment. The seat includes the integral hinge portion and the other features previously described. However, for ease of illustration, the shell is only schematically shown in Figures 37 to 39. A mounting rail 40 is coupled to the underside of the shell 11 by a nut and bracket arrangement 180. The mounting rail 40 is different to the previous embodiments in that it extends further to the rear of the seat to a position below the buttock support portions 12 and 14. Arranged between the ends 40'' of the mounting rail 40 below the support portions 12 and 14 are coil springs 182. The coil springs 182 are coupled to the shell 11 by bolts 183 which can be screwed into holes formed in the shell 11 or can be embedded in the shell 11 and have nuts (not shown) coupled to the bolts for securing the coil springs 182 in place. The lower end of the coil springs 182 are connected to the ends 40'' of the mounting rail 40 by a bolt and nut arrangement 184.

The seat functions in the same manner as described with reference to the embodiment of Figures 23 to 35 except that the springs 182 act to slightly dampen the movement of the support portions 12 and 14 and also to facilitate return of the support portions 12 and 14 during pedalling motion.

In the side view shown in Figure 38, the front portion of the rail 40 is secured to the shell 11 in a slightly different fashion to that shown in Figure 37. In Figure 38, the rail 40 passes through a loop or eye 185 which in turn is connected to the shell 11 by a bolt and nut arrangement 186.

In the rear view shown in Figure 40, the slot 16 between the support portions 12 and 14 is provided with a bridging section 187 which is flexible in nature and merely provided for aesthetic purposes. The bridging section 187 allows movement of the support portions 12 and 14 as previously

described without altering or influencing the movement of those portions.

---

Figure 41 shows a further embodiment similar to Figure 37 in which the springs 182 are replaced by an integral spring 190 formed integral with the rail 40. The rail 40 may be formed from steel material and the curved portion of the rail 40 which forms the spring 190 provides the same spring effect as the coil springs 182 previously described. The rail 40 is connected to the front portion of the shell 11 in the same manner as described with reference to Figure 39 and the end of the spring section 190 is secured to the shell 11 by locating the end 192 in a hole 194 in a boss 196 formed integral with the shell 11.

Figure 42 shows a rear view of the embodiment of Figure 41 but with the slot 16 omitted so that the support portions 12 and 14 are continuous and can move independently in view of the flexibility of the shell 11.

Figure 43 shows a bicycle seat 210 according to another embodiment of the invention. The seat 210 has a base plate 212 to which is welded or otherwise secured a pair of rails 214 to enable the seat 10 to be secured to a bicycle in a manner which is well known. The base plate 212 supports an inflatable hollow housing 216. The housing 216 is preferably made from elastomeric material so that it can expand when inflated by the application of fluid to the interior of the housing 216. An inlet valve 218 is provided in the housing 216 for enabling fluid to be pumped into the housing 216 by a conventional bicycle pump or any other suitable source of pressurised fluid.

The housing 216 has two portions 216a and 216b which are joined by a bridging passage 220. The portions 216a and 216b receive a part of the buttocks of a rider and the bridging passage 220 enables fluid, preferably air, to move

from one portion 216a to the other portion 216b through the passage 220 as the rider pedals and as more pressure is supplied to one of the sections 216a or 216b than the other of the sections 216a or 216b.

5

The structure shown in Figure 43 could be located on the seats shown in Figures 23 to 42 to act as the upholstery or cushioning for those seats.

10 As is shown in Figure 44, the section 216b is shown slightly compressed and collapsed due to additional weight of a rider (not shown) applied to that portion during pedalling of a bicycle. Fluid in the portion 216b therefore passes through the passage 220 into the portion  
15 216a and the portion 216a is inflated further by the fluid which passes from the portion 216a. Thus, as pressure is applied to the portion 216b, that portion can slightly collapse under the pressure of a rider and the portion 216a which may have reduced pressure applied to it during  
20 cycling motion is able to expand to maintain support of the rider during pedalling motion. Thus, as the rider pedals, the portion 216a and 216b in turn basically collapse and expand as fluid is pushed from one portion 216a to the other portion 216b and then back from the portion 216b to  
25 the portion 216a during the pedalling motion so that the seat moves with the rider somewhat in seesaw fashion by virtue of the transfer of the fluid from the portion 216a to the portion 216b. This provides comfort to the rider because the seat is changing shape as the rider pedals and  
30 also provides support during the pedaling motion because the seat basically expands and collapses as pressure is applied and reduced to the seat during the pedalling motion.

35 Preferably the housing 216 is reinforced by reinforcing such as ribbing, a cell structure, a support frame or the like (not shown) so that when air is applied to the inlet

Figure 45 shows an embodiment of the invention in which a seat 220 is in the form of a normal lounge seat or car seat etc rather than a bicycle seat and wherein the housing 210' is located in the seat 220 and which operates as described with reference to Figure 43. In this embodiment, the shape of the housing 210' may be different from that shown in Figure 43 but as a user shifts his or her position on the seat, fluid will transfer from one part of the housing 210' to another part so that the housing expands and contracts during the movement generally in the same manner as described with reference to Figure 43.

Thus, in the embodiment of Figure 46, the passageway 230 is  
35 basically in a different position to the passageway 220 in  
Figure 43. By locating the passageway in different  
positions, the nature of the transfer of fluid from one



portion of the housing 210 or 210' or 210" to another  
~~portion of the housing can change to slightly alter the~~  
inflation or expansion characteristics of the various  
portions of the housing during movement of a user on the  
5 seat.

Returning to Figure 43, for example, if the passageway 220  
was located as shown by the dotted lines in Figure 43 and  
referenced by the numeral 220', more air may be applied to  
10 the front portion of the seat during fluid transfer to  
basically cause the front portion to inflate slightly  
greater than the rear portion of the seat which will change  
the shape characteristics slightly and therefore the nature  
of support during pedalling.

15 Figure 47 shows yet a further embodiment of the invention.  
In the embodiment of Figure 47, a seat 240 is shown which  
has a pair of buttock support sections 242 which are  
separated by a longitudinal slot 244. A horn section 244  
20 joins the two buttock support sections 242 so that the seat  
is generally of the conventional shape of a bicycle seat  
except for the inclusion of the slot 244 between the  
buttock support sections 242. Hinge portions 246 are  
provided between the buttock support sections 242 and the  
25 horn section 244 and the hinge sections 246 are made from  
spring material such as spring metal or spring plastics  
material or polymers. As is shown in Figure 48, the  
buttock support sections 242 are angled upwardly at an  
angle with respect to the horn section 244 so that when a  
30 rider seats on the seat, the buttock support sections 242  
will pivot about the spring material hinge 246 under the  
weight and/or pressure supplied by the user.

The seat 240 may be formed from spring metal material or  
35 spring plastic material and in such an embodiment, the  
hinge sections 246 are merely integral portions of the seat  
240 and defined by the transition areas between the buttock

support sections 242 and the horn section 244. However, in other embodiments, the buttock support sections 242 and the horn section 244 may be formed from non-spring material such as aluminium plate or steel plate and the buttock support sections 242 may be connected to the horn section 244 by the hinge portions 246 which are formed from spring material such as spring steel or spring plastic material.

When a user seats on the bicycle seat of Figure 47, the buttock support sections 242 will tend to move downwardly as shown by arrow A in Figure 48 and also slightly towards the side as shown by arrow C in Figure 49. The separation of the buttock support sections 242 in Figure 49 is exaggerated to show the slight sideways movement of the portion 242 as the user seats on the seat. During pedalling motion, the portions 242 will therefore tend to move upwardly and downwardly as shown by arrows D and E in Figure 50 as the rider pedals and as pressure is applied to one of the portions 242 and then reduced and as pressure is applied to the other portion 242 so that the portions 242 basically move in paddle like or seesaw like movement during pedalling motion by the user.

Figure 51 shows a further embodiment of the invention in which a bicycle seat 250 is provided with an abutment portion 252 which is formed within remaining surface portion 254 of the seat 250. Thus, the abutment portion 252 and remaining surface portion 254 would normally make up the seat area on which a rider would seat during riding of a bicycle.

Figure 52 shows a similar embodiment to Figure 51 except there are two abutment portions 252 instead of one and Figure 53 shows yet a further embodiment in which the abutment portion 252 is in a slightly different position than in Figure 51.

As is best shown in Figure 54, the abutment portion 252 is preferably completely separate to the remainder 254 of the seat and is spring biased by a biasing member such as a spring 256 so that the abutment portion 252 can move relative to the remaining seat portion 254. The spring 256 is provided between a base section 258 of the seat 250 and the abutment portion 252. In the embodiment shown in Figure 54, the spring 256 normally biases the abutment member 252 upwardly out of the plane of the remainder of the seat portion 254 so that before a rider seats on the seat, the abutment portion 252 is up above the level of the remaining portion 254 of the seat 250. In the embodiment of Figure 55, the abutment portion 252 is biased by the spring 256 so that it is below the remaining portion 254 of the seat before a rider seats on the seat. In other embodiments the remaining portion 254 and abutment portion 252 may initially be level with the abutment portion 252 being biased so it moves relative to the portion 254 when a user seats on the seat.

When a rider seats on the seat of Figure 54, the abutment portion 252 is pushed downwardly against the bias of the spring 256 and the abutment portion 252 is able to float by virtue of the spring bias supplied by the spring 256 during pedalling movement of a user to basically move up and downwardly relative to the remaining seat portion 254 as the rider pedals the bicycle to provide continually adjustable support as the rider moves during pedalling motion and as the pressure of the rider's anatomy changes during pedalling motion and also to provide comfort during the pedalling motion.

In the embodiment of Figure 55, the seat portion 254 will normally compress downwardly toward the base 258 as the rider seats on the seat and the abutment 252 will then be contacted by the user's anatomy. However, the abutment 252 in this embodiment moves under the bias of the spring 256

during the pedalling motion generally in the same manner as shown in Figure 54. However, because the abutment portion 252 commences at a level below the level of the remaining seat portion 254, the nature of support and movement is slightly different to provide slightly different support and comfort characteristics than the arrangement shown with reference to Figure 54.

Figure 56 shows one preferred embodiment of the abutment 252 and the biasing member 256. In this embodiment, the biasing member 256 is in the form of a resilient pad of elastic material and the abutment member 252 is in the form of a disc-shaped member.

Figure 57 shows the arrangement generally described with reference to Figures 54 and 55 in which the biasing member 256 is a spring. In the embodiment of Figure 58, the biasing member 256 is in the form of a leaf spring so that the movement characteristics of the abutment member 252 are along an arcuate line as shown by arrow E in Figure 58 rather than straight up and down as would be the case of the bias provided by the resilient elastic pad of Figure 56 and the coil spring of Figure 57. Movement of the abutment portion may also include some side to side movement as well as up and down movement or movement along an arcuate line.

Figure 59 shows a different embodiment of the abutment member 252. In this embodiment, the abutment member 252 is an inflatable chamber 252' which has an inlet valve 260 so that pressurised fluid can be supplied to the chamber 252' to inflate the chamber 252'. Thus, the chamber 252' can be inflated to adjust the upper surface 252a of the chamber 252' relative to the remaining seat portion 254 and in this embodiment the air pressure within the chamber 252' provides the biasing means for biasing the abutment member 252.

Figure 60 shows a similar arrangement to Figure 59 except that the nature of the inlet valve 260 is different. In Figure 60 the inlet valve 260 is a French valve.

- 5 Figures 61 and 62 show yet a further embodiment of the invention in which the abutment member 252 is also an inflatable chamber but in this embodiment, the abutment member 252 is ramp or wedge shaped having an inclined surface portion 259 side surface portions 261 and a rear surface 263. The rear surface 263 is formed in concertina type fashion so that as the wedge shaped chamber 252 is expanded, the concertina section 263 can concertina outwardly to accommodate expansion of the chamber 252 and to facilitate maintaining the chamber 252 generally in the wedge shape as shown in Figures 61 and 62. As in the embodiments of Figures 59 and 60, an inlet valve 264 is provided for the application of pressurised fluid.

- Figure 61 shows the chamber 252 partially expanded and Figure 62 shows a chamber fully expanded.

- Once again, by inflating the chambers 252, the inclined surface 252a of the chambers 252 will be biased outwardly relative to the seat portion 254 by the fluid pressure in the chambers 252 and as the rider pedals on the bicycle seat, the inclined surface 252 can provide support to assist location of the rider into a semi-standing position so that more power can be delivered as is more fully described in my international application PCT/AU94/00284. However, in this embodiment, the surface 252a can basically float by virtue of the bias provided by the air pressure as the rider pedals so that the portion 252a will move during pedalling motion to maintain support and comfort for the rider.

35

Figure 63 shows the seat according to Figures 51 to 60 in which floating abutment portions 252 are included and in

this embodiment of the invention an outer cover 269 is provided on the seat. The outer cover 269 could be formed from leather, cloth, PVC, webbing material or plastics material and would generally not interfere with the movement of the abutment portion(s) 252. The cover 269 merely prevents any likelihood of a user being pinched between the abutment portion 252 and the remainder of the seat 254 during movement of the abutment portion 252 relative to the remainder 254 of the seat.

10

Figure 64 shows a further embodiment of a seat 270 which is contoured generally in the same manner as the seat described with reference to Figure 46. However, in this embodiment, the seat contains two chamber sections 272 which can each be independently inflated by inlet valve 274 which communicate with the chamber 272 and project out of the bottom of the seat 270. Each of the chambers 272 can be inflated to a particular pressure to suit riding comfort and anatomy support during pedalling motion so that the portions 272 can move under the pressure applied during its pedalling motion by a user.

15  
20

Figure 65 shows an arrangement similar to Figure 64 but included in a chair.

25

Figures 66 to 73 show seats similar to the embodiments of Figures 59 and 60 in which abutment portions 252 are provided which are inflatable chambers and which cause the upper surface of the chamber 252 to move relative to the remainder 254 of the seat as the abutment portion 252 is inflated. The shape of the abutment portion 252 can be generally disc-shaped as previously described and any number of such abutment portion 252 can be provided. The abutment portions 252 can be provided at different parts or places on the seat as is shown by Figures 66 to 69.

30  
35

Figure 70 shows an embodiment in which the chambers 252 are

ramp shaped as described with reference to Figures 61 and 62.

---

Figure 71 shows a seat which has both ramp shaped and disc shaped abutment portions 252.

Figure 72 shows an embodiment in which the abutment portion 252 is shaped generally as per the shape described with reference to Figure 43 or Figure 46 and Figure 73 shows the similar shaped abutment portion 252 but on a slightly different position on the seat.

The inflatable abutment portions 252, which are generally formed by chambers as previously described, have a conduit 275 connected therewith so that pressurised fluid can be provided to the abutment portions 252 to inflate them to a required inflation pressure.

Figure 74 is a side view of the seats of Figures 66 to 73 and Figure 75 is a view similar to Figure 74 but with a cover 277 over the seat which function in the same manner as described with reference to Figure 63.

Figure 76 shows the abutment portion 252 which is in the form of a housing which has the same shape as the housing described with reference to Figure 46. An inlet tube 280' is formed on the abutment portion 252 forming a pressurised fluid inlet to the abutment portion 252. The conduit 275 may be connected to the inlet 280' as shown in Figures 77 or 78 by either locating an O-ring 282 about the inlet 280' and conduit 275 so as to seal the conduit 275 to the inlet 280' as shown in Figure 77 or by making the conduit 275 integral with the inlet 280' as shown in Figure 78.

As is shown in Figure 79 and 80, the end of the conduit 275 remote from the abutment portion 252 is provided with a connector 280. The connector 280 can be coupled to conduit

275, when the bicycle seat is located on a bicycle, preferably leads from the seat to the handle bars of the bicycle and the connector 280 may be secured to the handle bars at a suitable location by a bracket, clamp or the like.

A carbon dioxide cartridge 290 or like supply of  
10 pressurised gas is adapted to be fitted to the connector  
280 by screw threading the cartridge 290 into the recess  
282 so that the cartridge 290 locates on the connector 280  
as shown in Figure 81. As the cartridge 290 is screw-  
threaded all the way into the recess 282, a projecting  
15 button 286 in the recess 282 will contact a valve member  
(not shown) in the cartridge 290 to open the cartridge 290  
to enable compressed carbon dioxide in the cartridge 290 to  
flow from the cartridge 290, through the connector 280 into  
conduit 275 and therefore into the abutment portion 252 to  
20 inflate the abutment portion 252.

The tap 284 may be closed after the abutment member 252 is fully inflated so as to prevent escape of pressurised fluid and also to maintain the remainder of the pressurised fluid within the cartridge 290. The tap 284 therefore basically provides a locking control for locking the abutment 252 in the fully inflated position after the abutment portion 252 has been fully inflated.

30 In alternative embodiments, it would be possible to shut  
off flow of compressed gas from the cartridge 290 to the  
conduit 275 by simply partially unscrewing the cartridge  
290 so that the valve (not shown) in the cartridge 290  
shuts off. In this embodiment, it will be necessary to  
35 include a one-way valve in the conduit 275 or connector 280  
so as to prevent escape of pressurised fluid out of the  
abutment portion 252.



~~Thus, in order to place the abutment portion 252 in an~~  
active or support position outwardly of the remainder 254  
of the seat, the cartridge 290 is screwed into the  
5 connector 280 and the tap 284 open so as to inflate the  
abutment portion 252. The tap 284 can be closed to  
basically lock the abutment portion 252 in the inflated  
position. If the abutment portion 252 deflates, additional  
compressed gas can be supplied by simply opening the tap  
10 284 so additional gas is supplied from the cartridge 290 to  
the above portion 252.

The abutment portion 252 or conduit can be provided with a  
release valve 292 to release the pressure in the abutment  
15 portion 252 should that be necessary or should the abutment  
portion 252 be over inflated for a rider's requirement.  
Thus, by depressing the release valve 292, air pressure in  
the abutment portion 252 can be released out of the valve  
292. Alternatively, the tap 284 could be a 2-way tap for  
20 venting gas in the abutment portion 252 to atmosphere if  
desired.

This embodiment therefore provides a seat in which the  
abutment portion 252 can be adjusted relative to the  
25 remainder 254 of the seat by inflating the seat and the  
inflated abutment portion 252 will provide support during  
riding and also comfort to the rider during pedalling  
motion. The abutment portion 252 can be shaped to place  
the rider into a high performance position as described in  
30 my international application PCT/AU94/00284 or otherwise  
shaped to provide support and comfort to the rider during  
pedalling motion depending on the rider's requirements  
during pedalling motion.

35 Since modifications within the spirit and scope of the  
invention may readily be effected by persons skilled in the  
art, it is to be understood that this invention is not

1921 1922 1923 1924 1925 1926 1927 1928 1929 1930 1931 1932 1933 1934 1935 1936 1937 1938 1939 1940 1941 1942 1943 1944 1945 1946 1947 1948 1949 1950 1951 1952 1953 1954 1955 1956 1957 1958 1959 1960 1961 1962 1963 1964 1965 1966 1967 1968 1969 1970 1971 1972 1973 1974 1975 1976 1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2641 2642 2643 2644 2645 2646 2647 2648 2649 2650 2651 2652 2653 2654 2655 2656 2657 2658 2659 2660 2661 2662 2663 2664 2665 2666 2667 2668 2669 2670 2671 2672 2673 2674 2675 2676 2677 2678 2679 2680 2681 2682 2683 2684 2685 2686 2687 2688 2689 2690 2691 2692 2693 2694 2695 2696 2697 2698 2699 2700 2701 2702 2703 2704 2705 2706 2707 2708 2709 2710 2711 2712 2713 2714 2715 2716 2717 2718 2719 2720 2721 2722 2723 2724 2725 2726 2727 2728 2729 2730 2731 2732 2733 2734 2735 2736 2737 2738 2

## THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

- 
1. A support system, including;  
a first support portion and a second support  
5 portion for receiving a riders buttocks; and  
and a hinge for allowing each of the first and  
second support portions to undergo independent arcuate  
movement having a component at least in a substantially  
vertical plane when the rider is seated on the support  
10 portions and performing a pedalling motion.
2. A support system, including;  
a first support portion and a second support  
portion for receiving a riders buttocks;  
15 a front portion coupled to the first and second  
support portions; and  
and a hinge between the first and second support  
portions and the front portion for allowing each of the  
first and second support portions to undergo substantially  
20 independent arcuate movement having a component at least in  
a substantially vertical plane when the rider is seated on  
the support portions and performing a pedalling motion.
3. The support system of claim 2, wherein the first  
25 and second support portions are separated by a longitudinal  
slot.
4. The support system of claim 2, wherein the hinge  
comprises a first hinge between the first support portion  
30 and the front portion and a second between the second  
support portion and the front portion.
5. The support system of claim 2, wherein the  
support system includes an integral shell which includes  
35 the first and second support portions, the front portion  
and the hinge with the hinge being defined by a transition  
between the support portions and the front portion.

6. The support system of claim 5, wherein the shell  
is provided with upholstery which covers the shell.

5 7. The support system of claim 2, wherein the  
support system has connecting means for connecting the  
support system to an article, the connecting means being  
coupled to the front portion between a front end of the  
front portion and the hinge so as not to interfere with  
10 flexing movement of the hinge and the arcuate movement of  
the first and second support portions.

8. The support system of claim 7, wherein the  
connecting means comprise connecting rails.

15 9. The support system of claim 8, wherein the  
connecting rails are coupled to the shell by embedding  
portions of the rails into the shell when the shell is  
formed.

20 10. The support system of claim 2, wherein the  
support portions are cupped shaped for receiving the  
ischial bone region and buttock region of a rider.

25 11. The support system of claim 2, wherein the front  
portion comprises a truncated nose.

12. The support system of claim 2, wherein the front  
portion includes a soft padding to extend the length of the  
30 truncated nose, wherein, in use, the soft padding collapses  
when contacted by a rider.

13. A support system including;  
first and second support portions, the first and  
35 second support portions each having a depression for  
receiving the ischial regions of a persons anatomy;

a raised portion between and forward of the  
~~depressions of the first and second support portions, for~~  
receiving the ramus of the ischial regions or the ischial  
regions of a persons anatomy;

5                   and a nose section which extends forwardly of the  
support portions and which declines from the support  
portions towards a front end of the nose section.

14.           The support system of claim 13, wherein the first  
10   and second support portions are separated by an elongated  
slot.

15.           The support system of claim 13, wherein the first  
and second support portions and the front portion are  
15   integral with one another by being made as an integral  
shell.

16.           The support system of claim 13, wherein the  
support portion includes upholstery on the shell.

20           17.           A support system, including;  
a support portion for receiving a users buttocks;  
a truncated nose extending forwardly from the  
support portion;

25                   a soft collapsible upholstery member provided on  
the nose portion for extending the nose portion forwardly  
and/or upwardly with respect to the support portions.

18.           The support system of claim 17, wherein the self  
30   collapsible material is a foam or sponge material or  
polyurethane or the like.

19.           The support system of claim 17, wherein the  
support portions and truncated nose are formed as a  
35   integral shell from plastics materials.

20.           A bicycle seat, including:

a slot in the rear portion dividing the rear portion into two separate support portions; and

26. The bicycle seat of claim 24, wherein the spring  
35 is integral with the mounting rail and be defined by a  
curved or bent portion of the mounting rail.

27. The bicycle seat of claim 20, wherein the nose portion has an undercut for receiving a front portion of the mounting rail to secure the front portion of the mounting rail to the shell.

5

28. The bicycle seat of claim 20, wherein stop means is provided for limiting movement of the two support portions.

10 29. A bicycle seat, including:

a nose portion;

a rear support portion coupled to the nose portion, the rear support portion having first and second support portions;

15 a hinge for allowing each of the first and second support portions to undergo substantially independent movement relative to one another and the nose portion, the independent arcuate movement having a component at least in a substantially vertical plane when the rider is seated on the support portions and forming a pedalling motion; and  
20 stop means for limiting the amount of movement of the first and second support portions.

30 30. The bicycle seat of claim 29, wherein the bicycle seat includes a mounting rail for mounting the seat to a bicycle and the stop means comprises end portions of the mounting rail which are spaced from the first and second support portions and positioned below the first and second support portions.

30

31. A bicycle seat, including:

a nose portion;

a rear portion for receiving a rider's buttocks; the nose portion and rear support portion having

35 an upper surface and a lower surface;

a mounting rail coupled to the lower surface;

a cut-out in the nose portion for receiving a front portion of the mounting rail to hold the front portion of the mounting rail to the bicycle seat; and

securing means for securing the mounting rail to the lower surface substantially at a middle portion of the lower surface so the rear portion is free and not connected to the mounting rail.

32. The bicycle seat of claim 31, wherein the securing means comprises a bracket and bolt and nut for clamping the mounting rail to the lower surface.

33. The bicycle seat of claim 32, wherein the bolt is embedded in the shell for receiving the nut and the bracket to couple the bracket and therefore the mounting rail to the bicycle seat.

34. A support system including:  
an inflatable housing which defines a chamber for receiving a fluid; and  
wherein when a user is supported by the support system and moves, fluid is caused to move from one part of the housing to another part of the housing so that the said one part can change its shape and/or form and the fluid flow to said another part causes the said another part to change its shape and/or form in response to the change in fluid in said another part of the housing.

35. The support system of claim 34, wherein the housing includes a fluid inlet in the housing for enabling fluid to enter the housing.

36. The support system of claim 34, wherein the housing includes rigid sections so that the general shape of the housing is maintained notwithstanding the fact that the housing is able to expand or collapse during movement of the user on the seat.



37. The support system of claim 34, wherein the housing includes two housing portions joined by a fluid passage so that when fluid passes from one part of the housing to the another part of the housing, the fluid passes through the fluid passage to thereby direct the fluid to particular parts of the housing for expansion of those parts of the housing.
- 10 38. The support system of claim 34, wherein the housing is made from elastomeric material such as rubber, elasticated plastic or like stretchable material to enable expansion and contraction of the housing as the fluid moves from one part of the housing to another part of the housing.
- 15 39. The support system of claim 38, wherein the seat has a base plate for supporting the housing.
- 20 40. The support system of claim 39, wherein the base plate has attachment means for attaching the seat to an article.
41. The support system of claim 40, wherein the attachment means comprises a pair of rails.
- 25 42. A support system including:  
a first portion;  
a second portion;  
the first and second portions being coupled to one another by spring material so that the first portion can move in response to a user's weight and/or pressure applied by a user when a user is supported by the support system and return as a user moves and reduces pressure and/or weight on that portion of the support system.
- 30  
35

43. The support system of claim 42, wherein the first portion of the support system includes two separate sections.

---

5 44. The support system of claim 42, wherein the first portion of the support system and the second portion of the support system are formed from spring material and the hinge is an integral part of the support system forming a transition between the first and second portions.

10

45. The support system of claim 42, wherein the first and second portions are formed from non-spring material and be coupled together by a hinge section formed from spring material.

15

46. A support system, including:  
an abutment portion within the support system;  
biasing means for biasing the abutment portion relative to the support system so that the abutment portion  
20 can move relative to the support system; and  
the biasing means providing a floating support for the abutment portions so that the abutment portion can move relative to the support system against the bias of the biasing means in response to the weight or pressure of a  
25 user when supported by the support system.

30

47. The support system of claim 46, including a single abutment portion which may be in the public area.

48. The support system of claim 46, wherein the abutment portions are ramp-shaped so as to form an inclined abutment portion.

35 49. A support system, including:  
at least two separate chambers in the support system; and



a fluid inlet to each of the chambers for allowing fluid to enter each of the chambers.





---

50. A support system including:  
5 an inflatable abutment portion coupled to the support system;  
a fluid inlet to the inflatable abutment portion for coupling with a fluid reservoir for retaining a supply of fluid; and  
10 fluid control means for allowing flow of fluid from the fluid reservoir to the inflatable abutment portion.
51. The support system of claim 50, wherein the fluid  
15 reservoir is coupled to the control means.
52. The support system of claim 50, wherein the fluid which is supplied to the housing or which is used to inflate the abutment portion(s) comprises air.  
20
53. A support system including:  
a support portion; and  
at least one abutment portion in the support portion, the abutment portion being a fluid chamber for  
25 containing a fluid.
54. The support system of claim 53, wherein the fluid chamber includes a fluid inlet and the fluid chamber is an  
30 inflatable chamber.
55. A support system including:  
an abutment portion coupled to the support system;  
35 fluid receiving means for moving the abutment portion relative to the support system; and  
fluid control means for controlling the



[illegible]

1/22

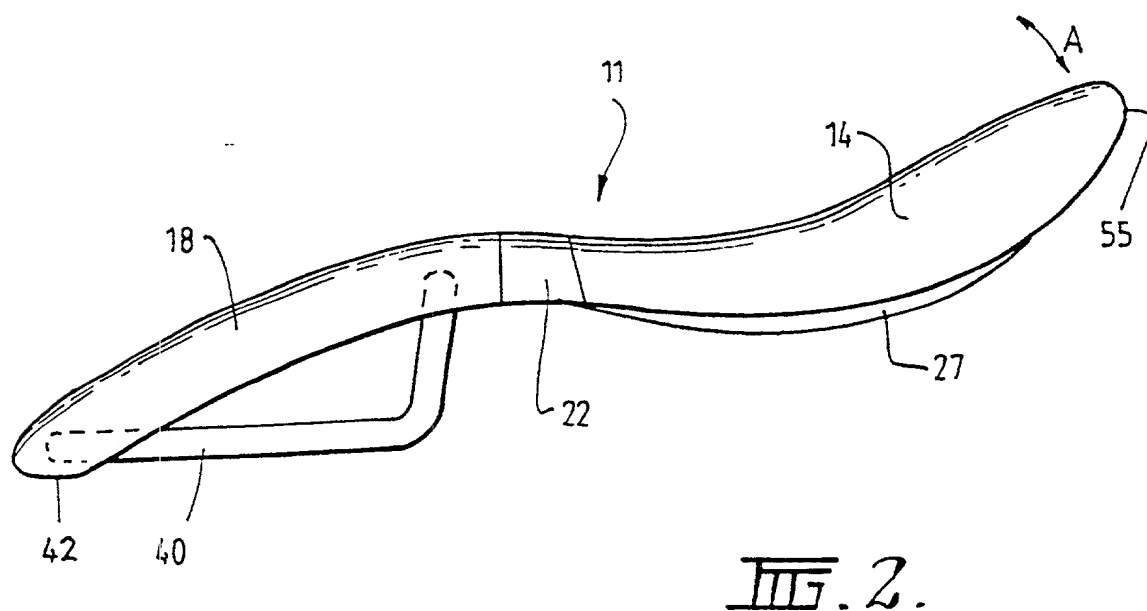
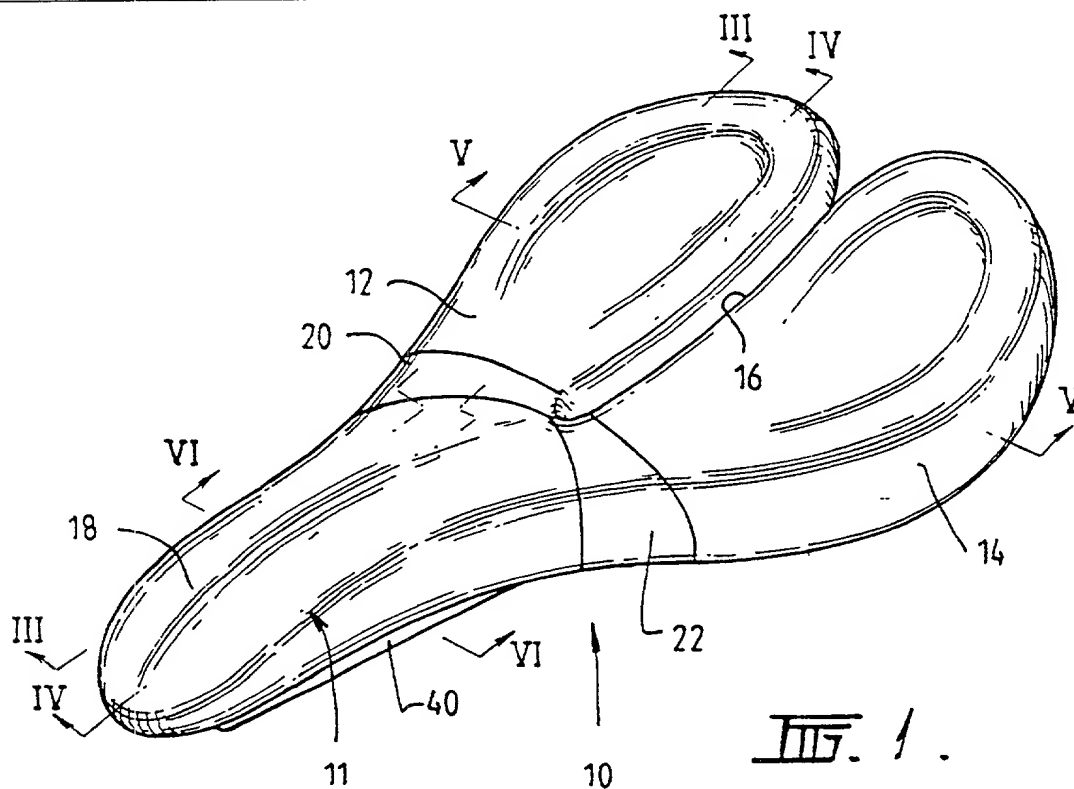


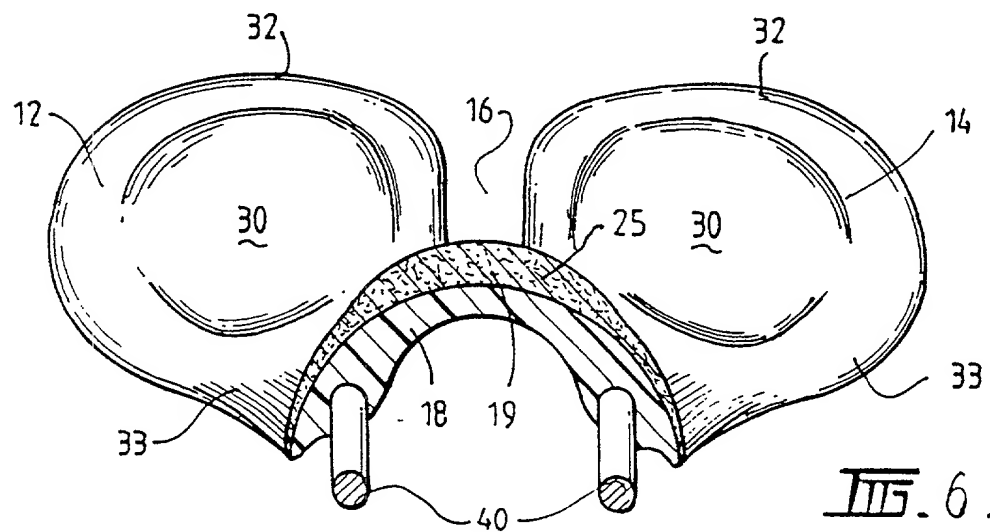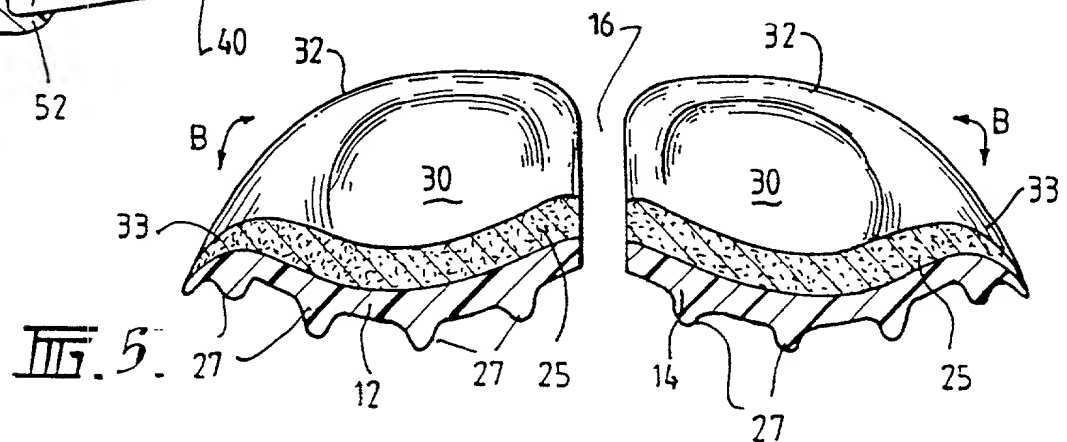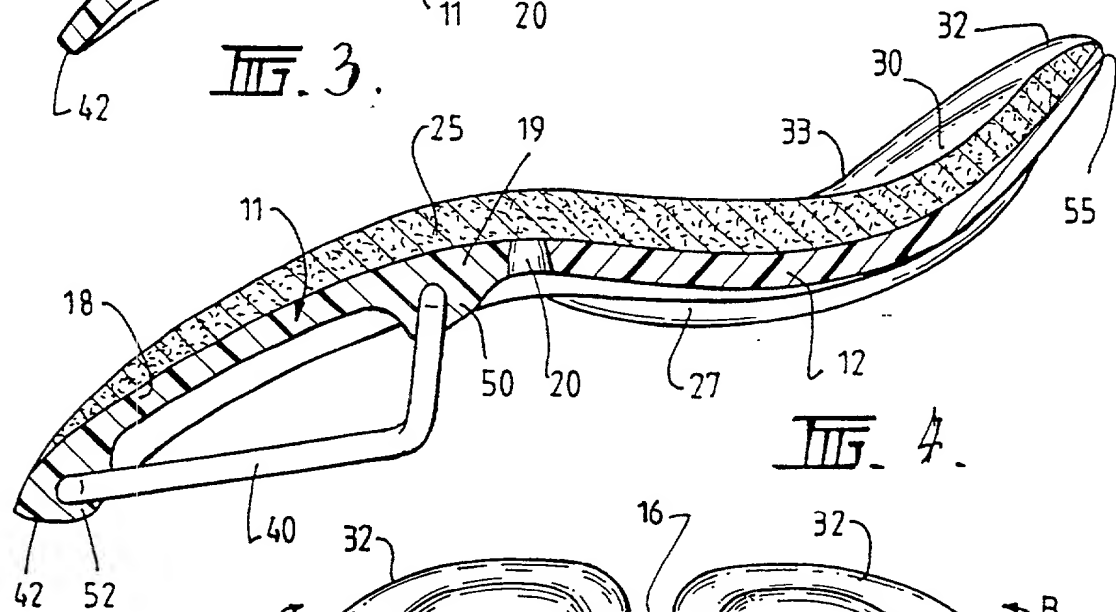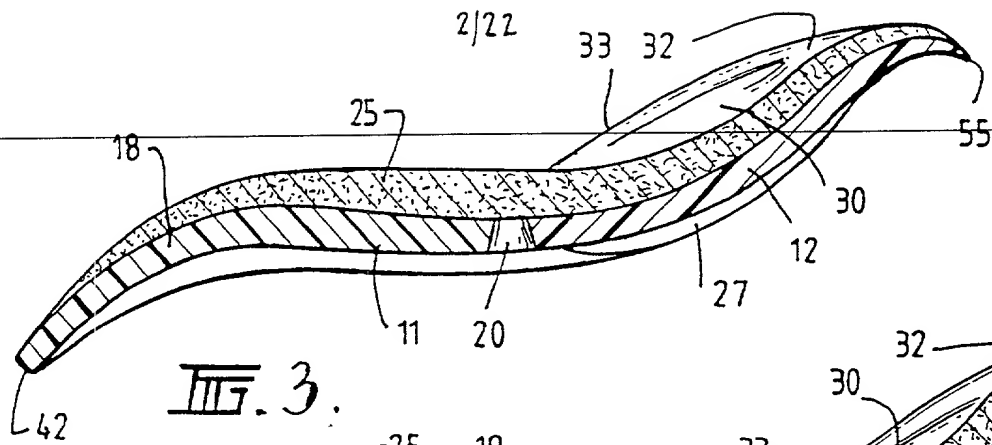

3/12

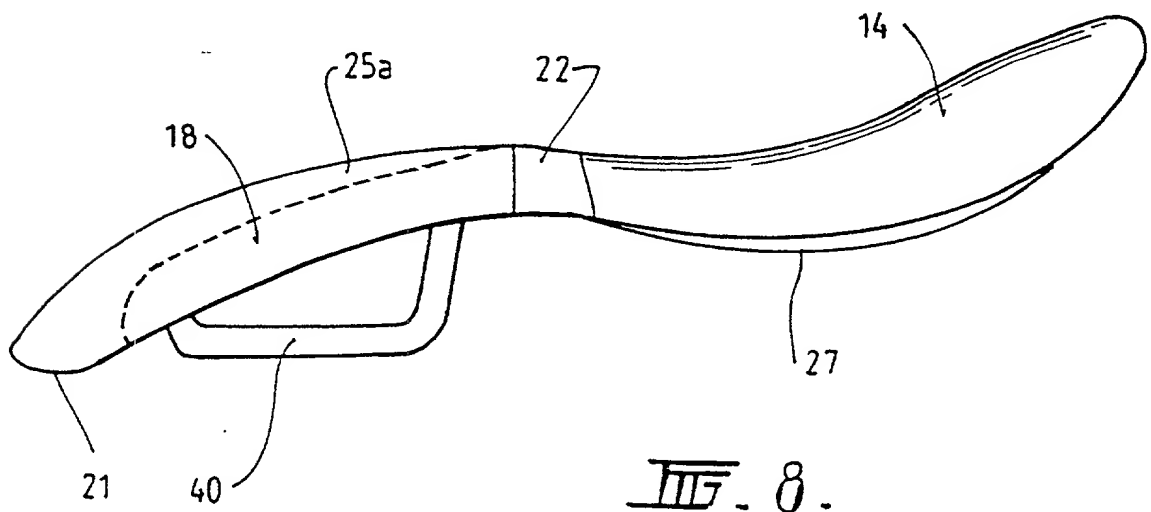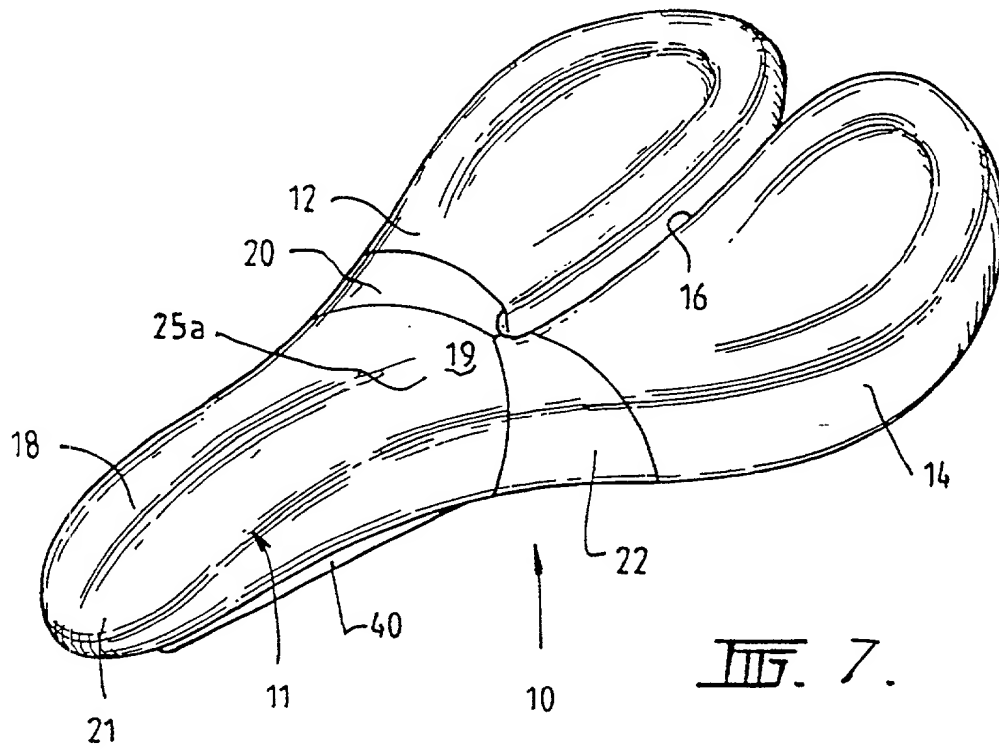

4/22

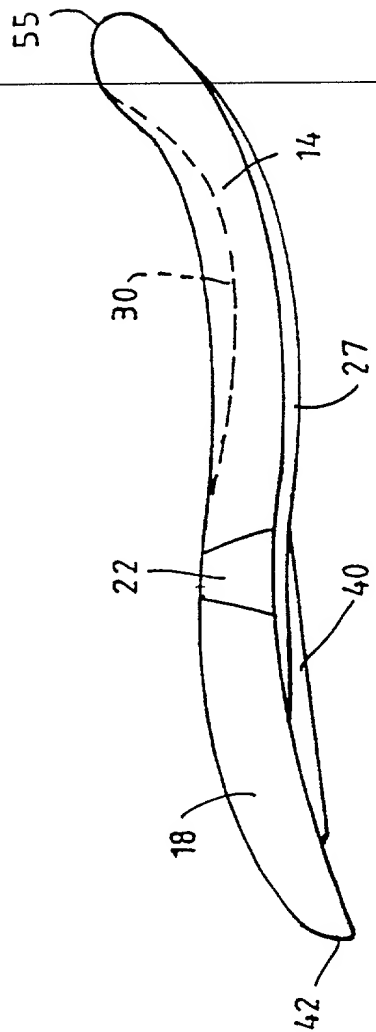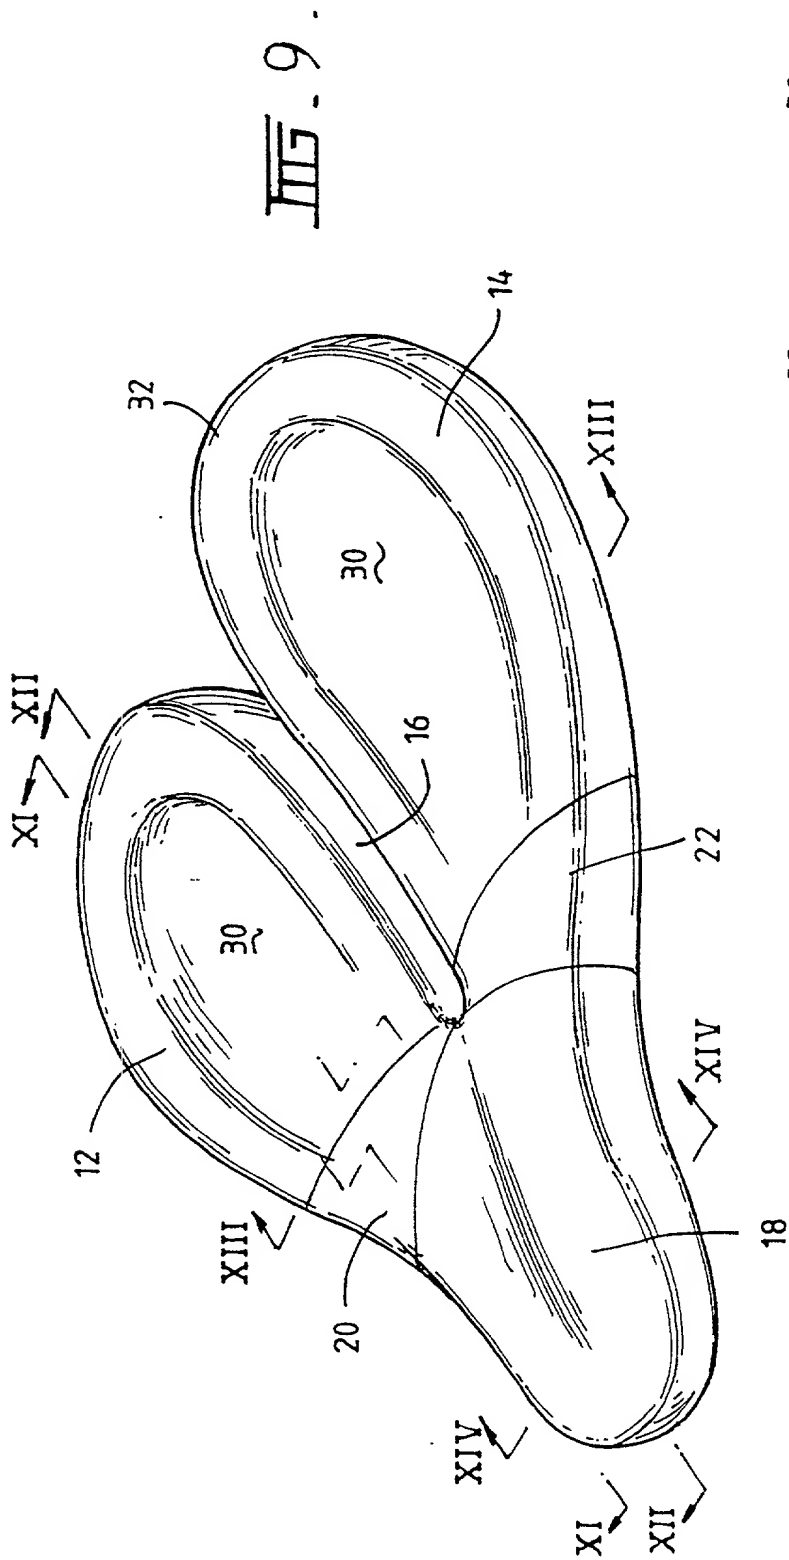



5/22

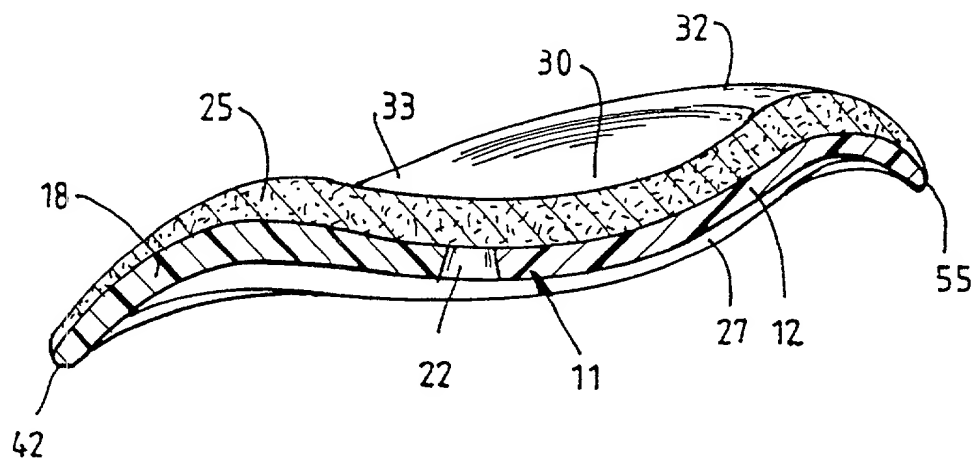


FIG. 11.

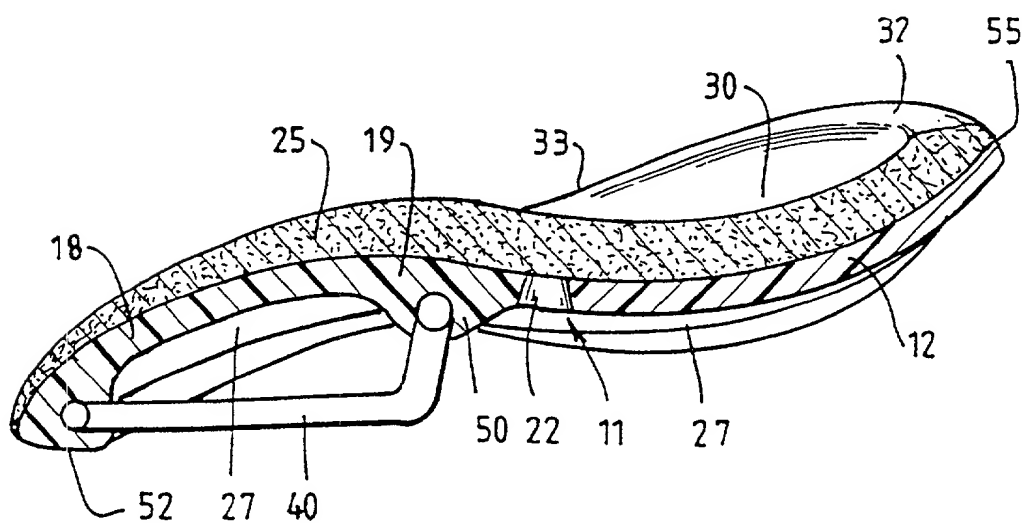


FIG. 12.

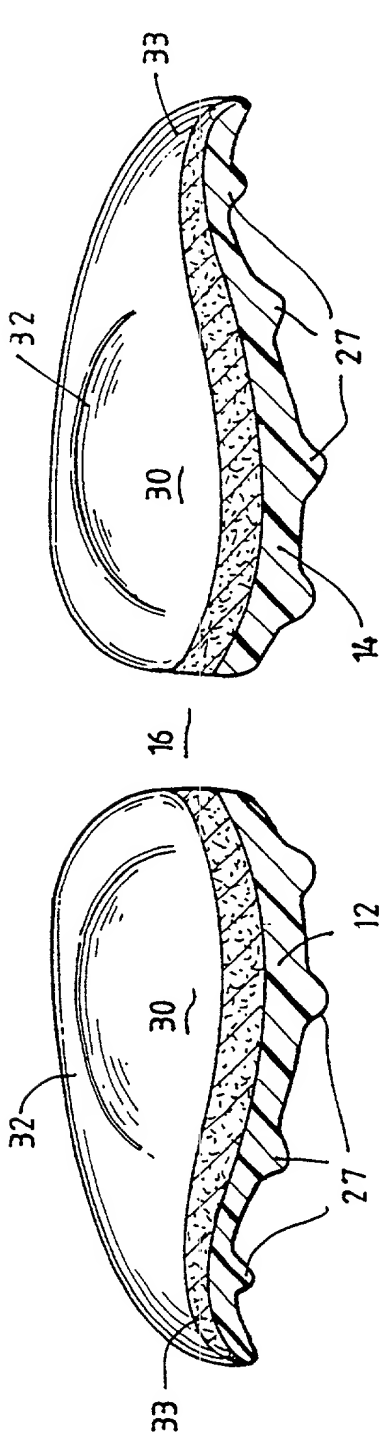


Fig. 13.








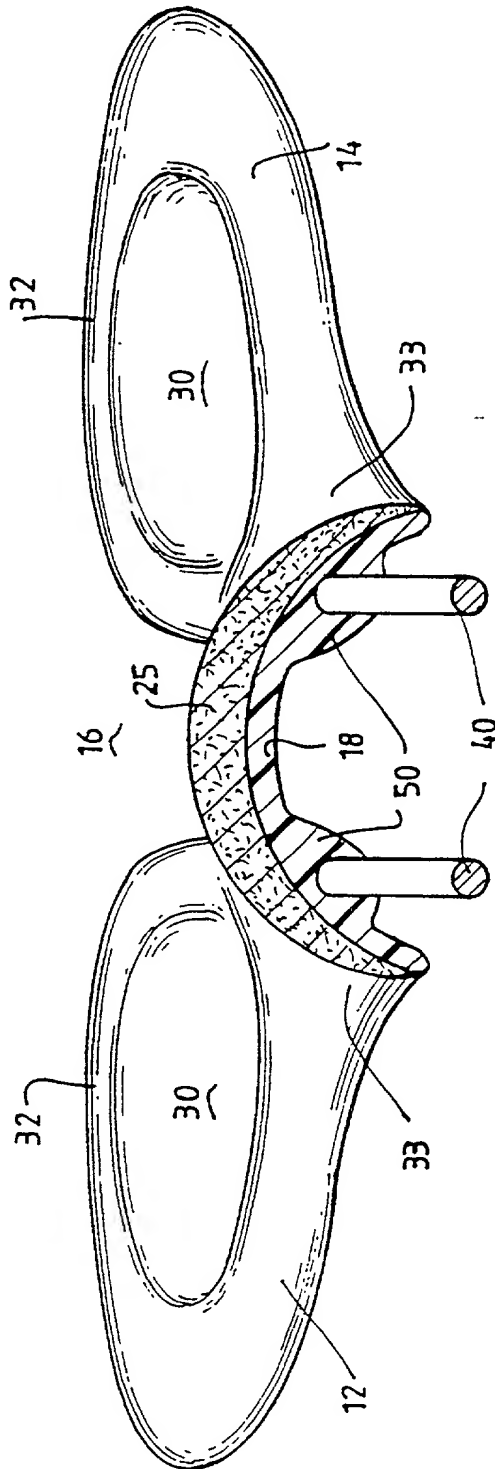





Fig. 14.

7/22

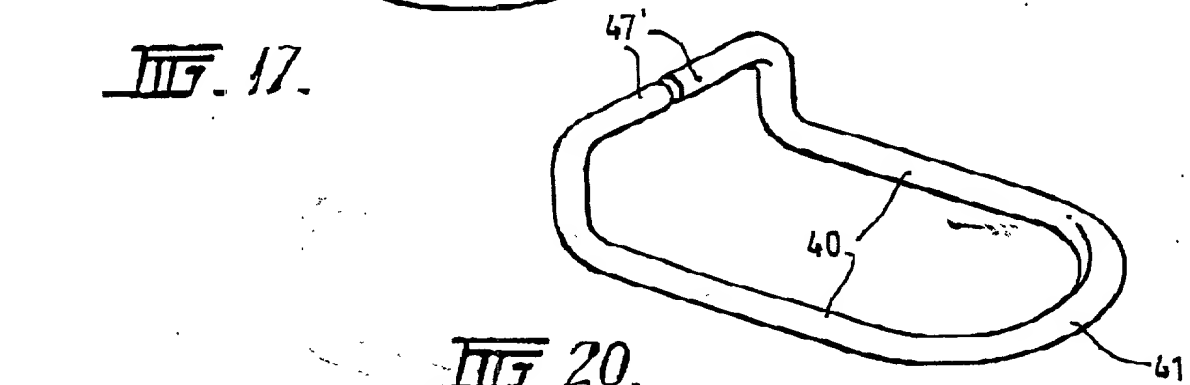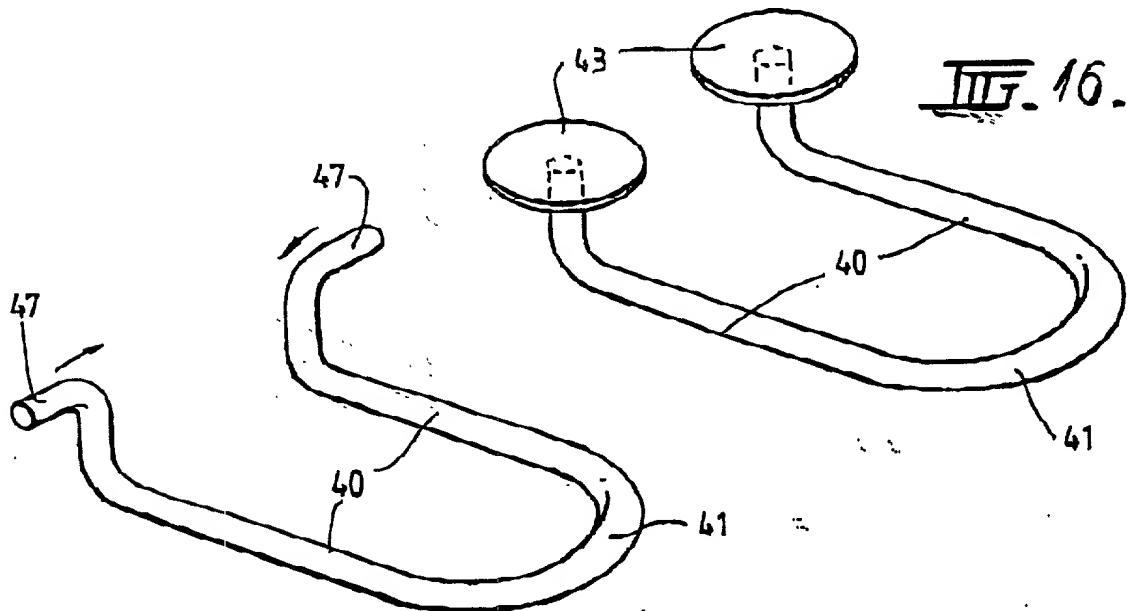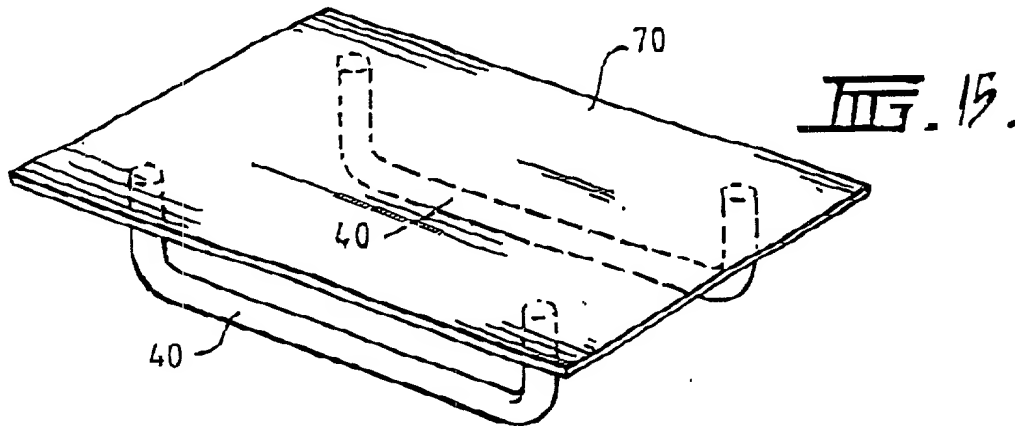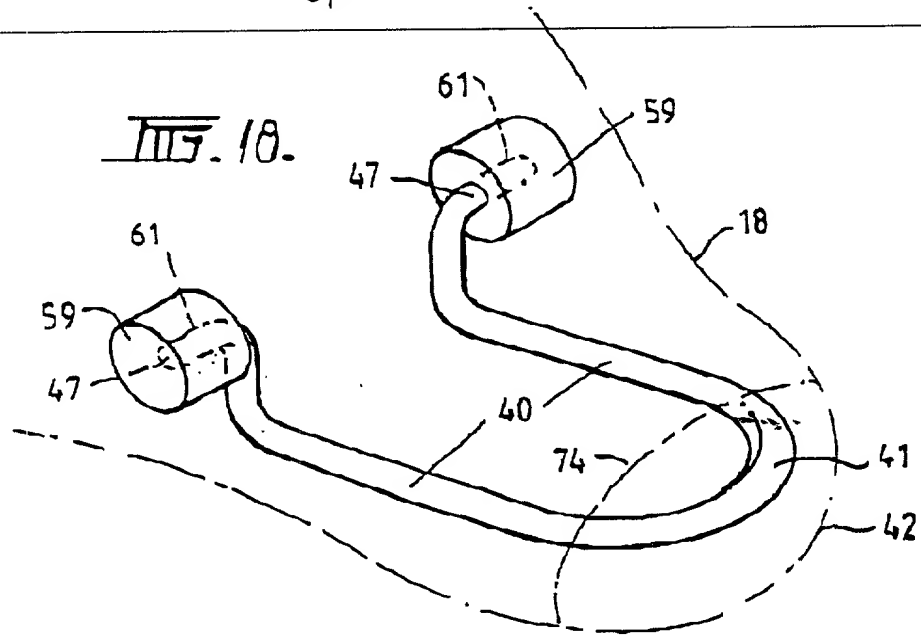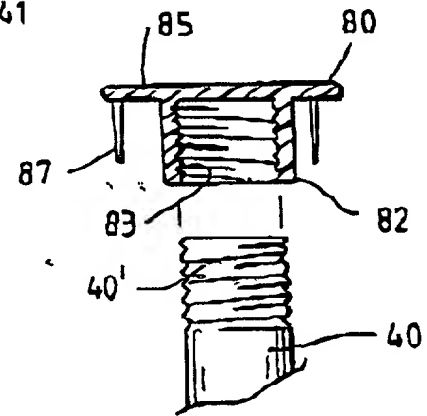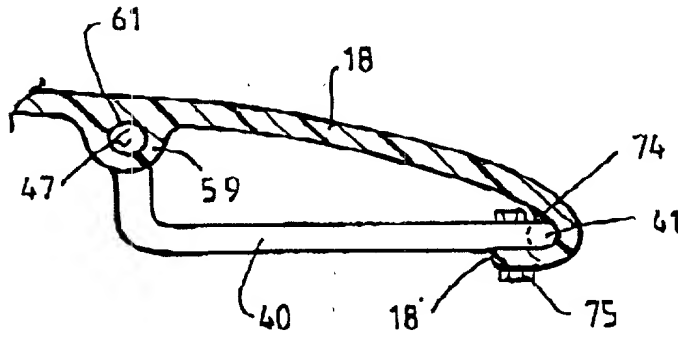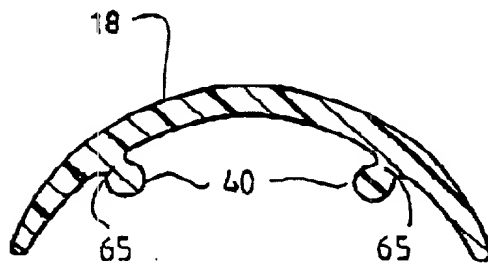

8/22

FIG. 18.FIG. 19.FIG. 21.FIG. 22.

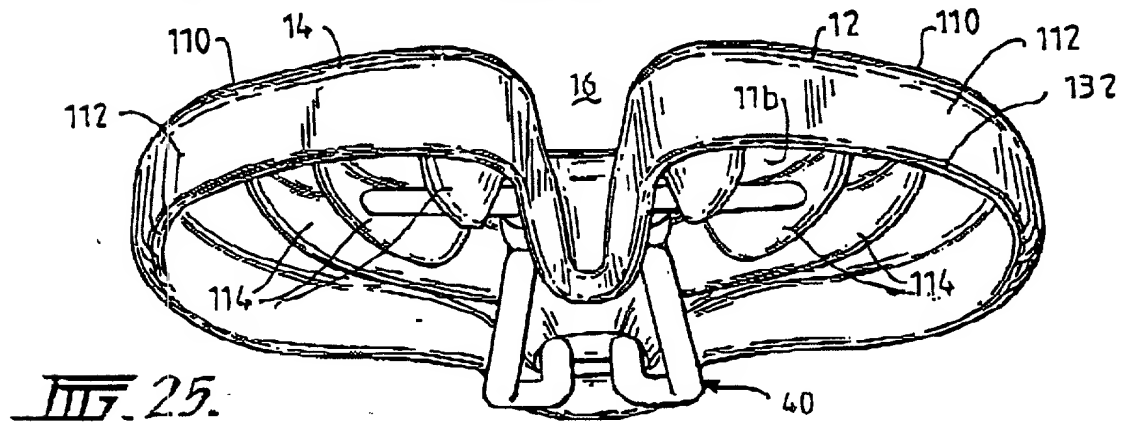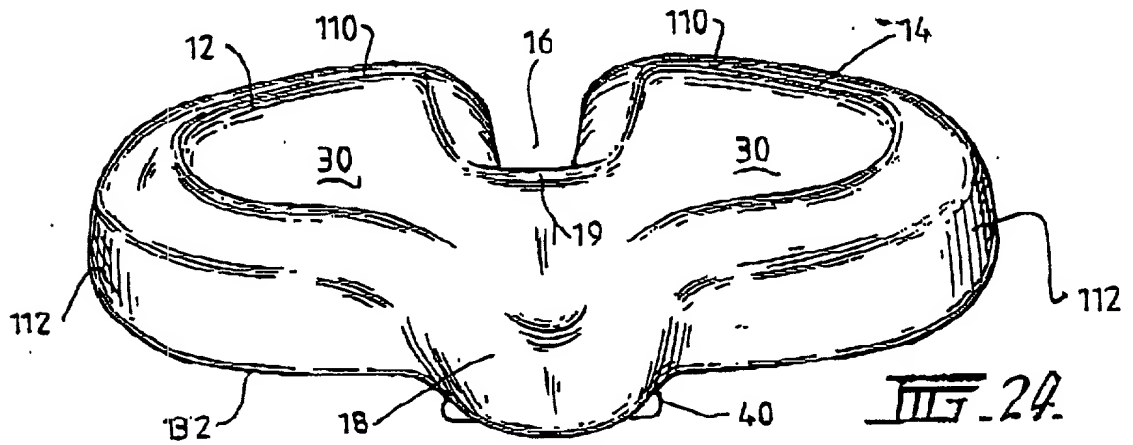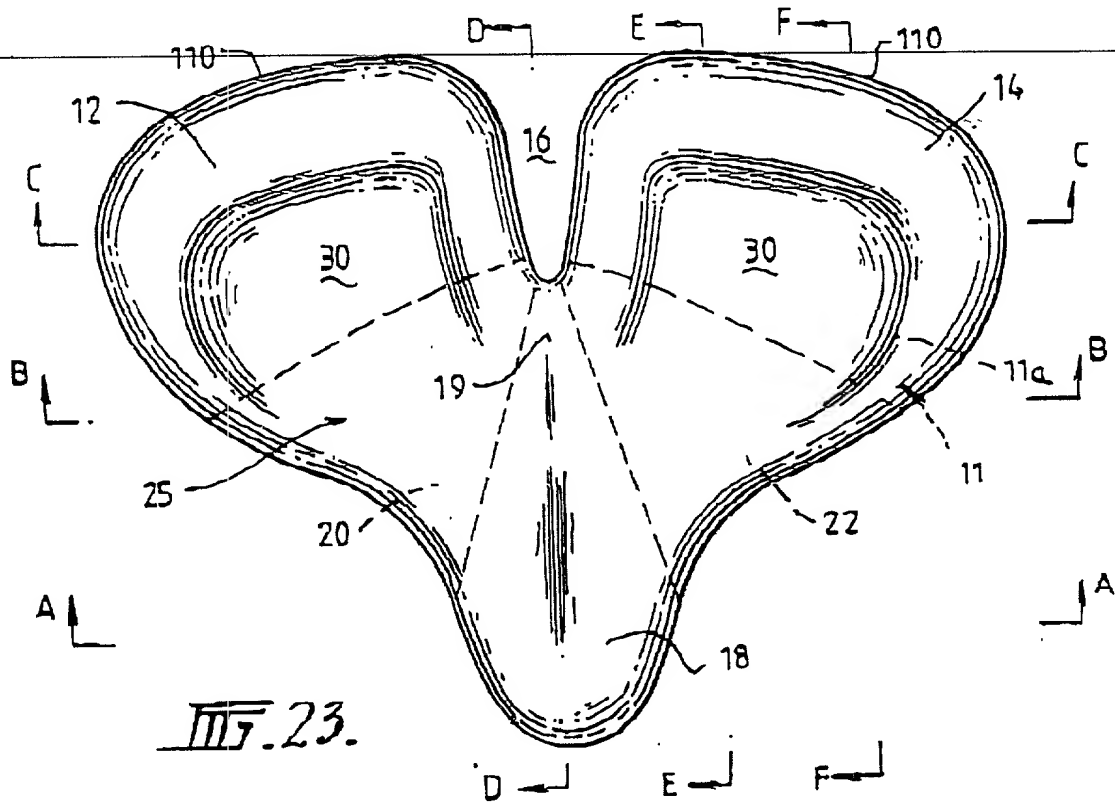

09/319683

WO 98/25810

PCT/AU97/00818

10/22

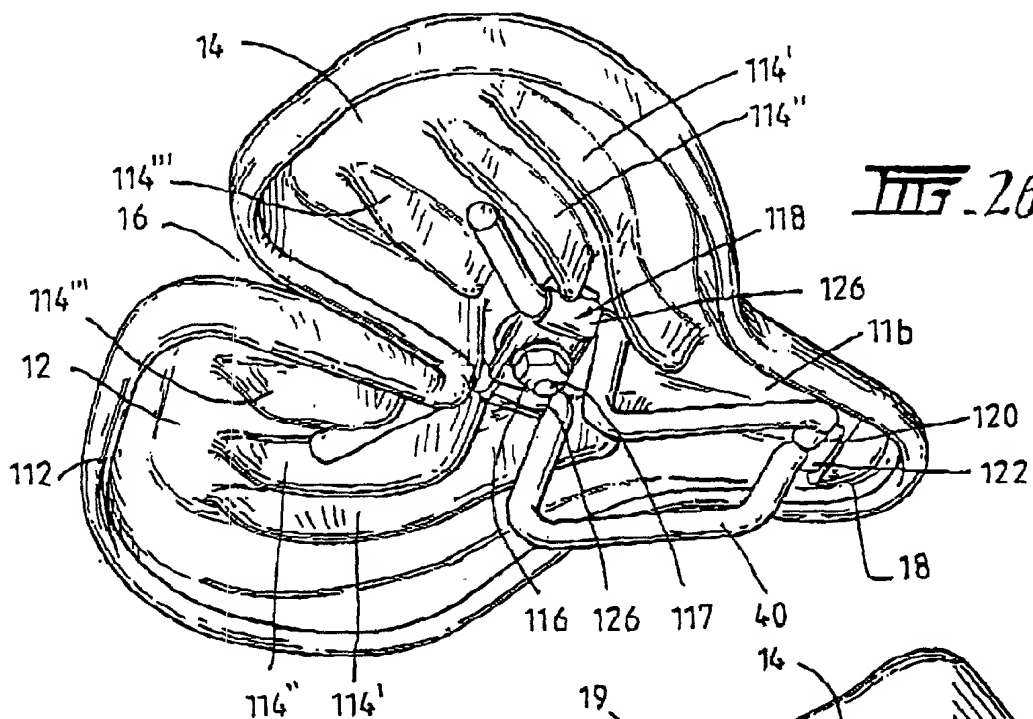


FIG. 26.







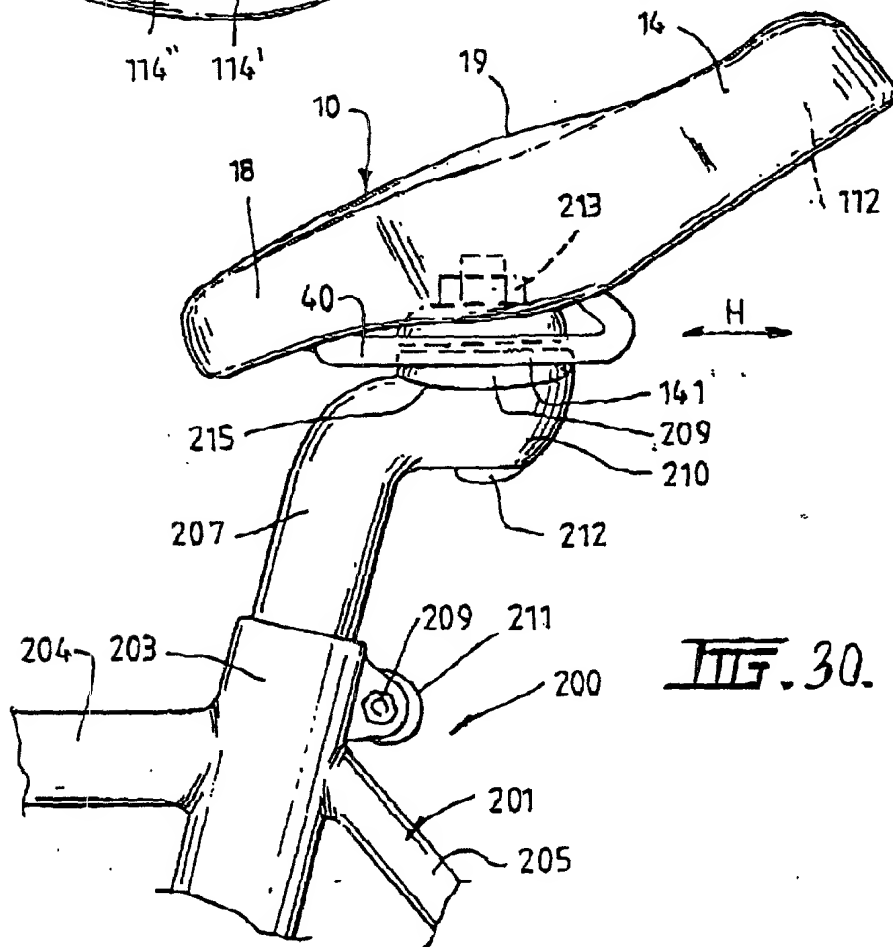


FIG. 30.

660390" E895T E60

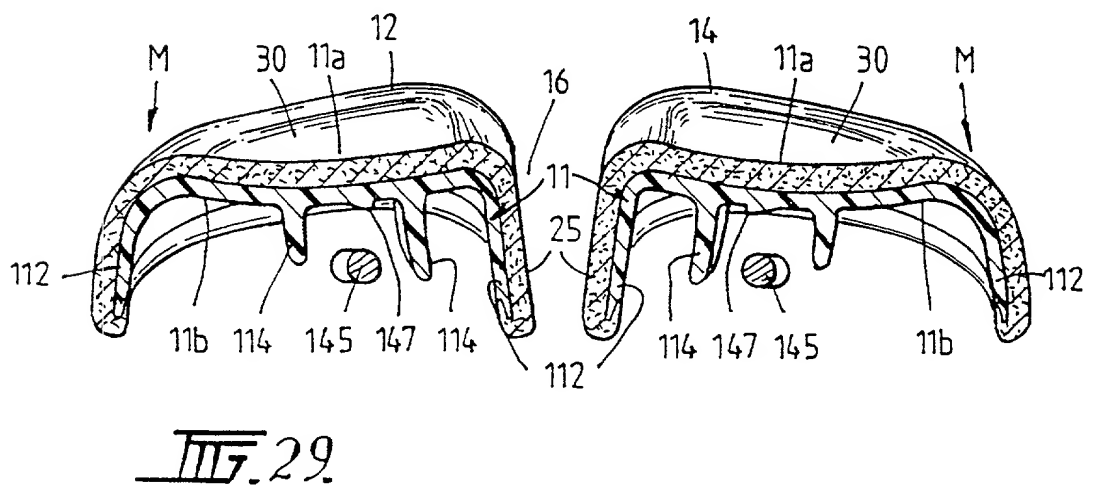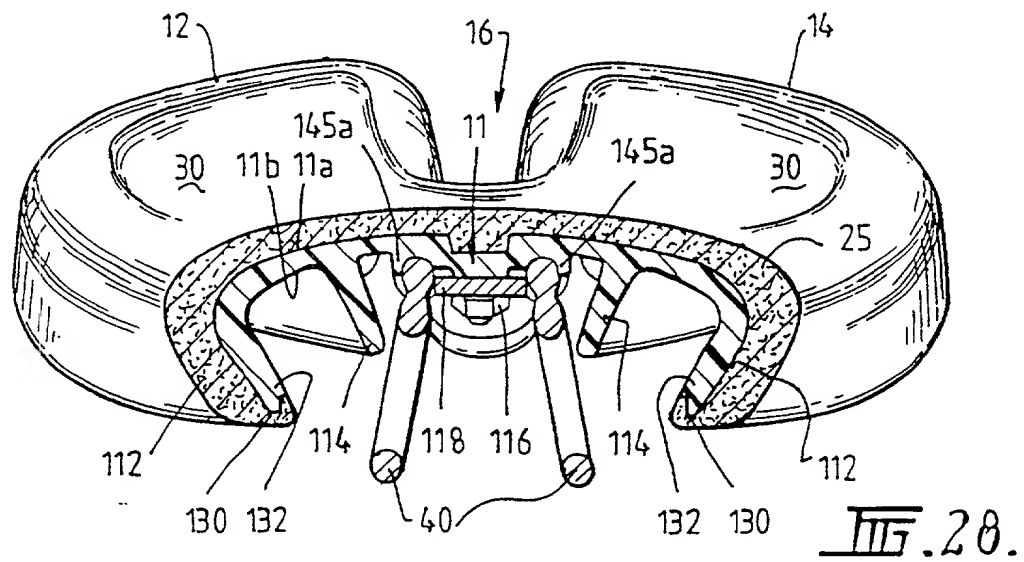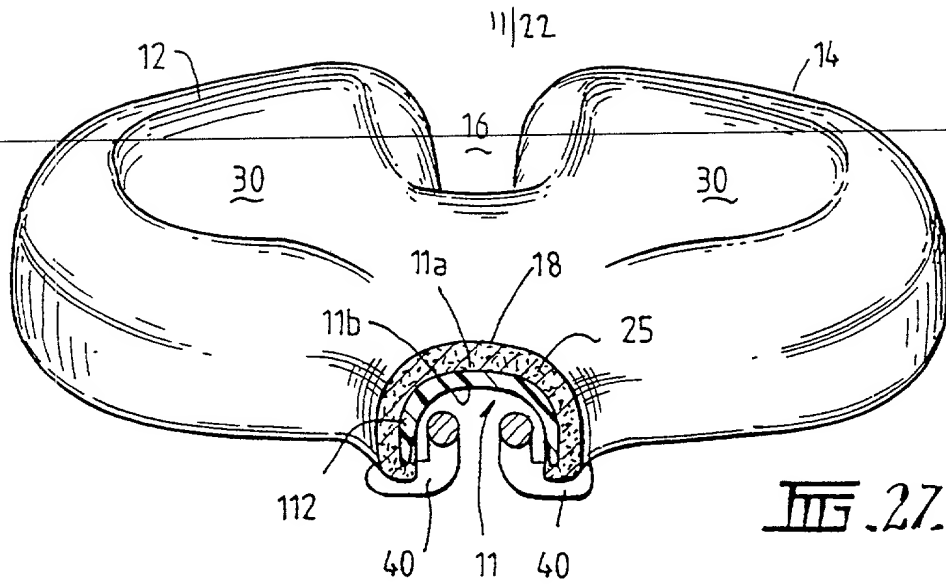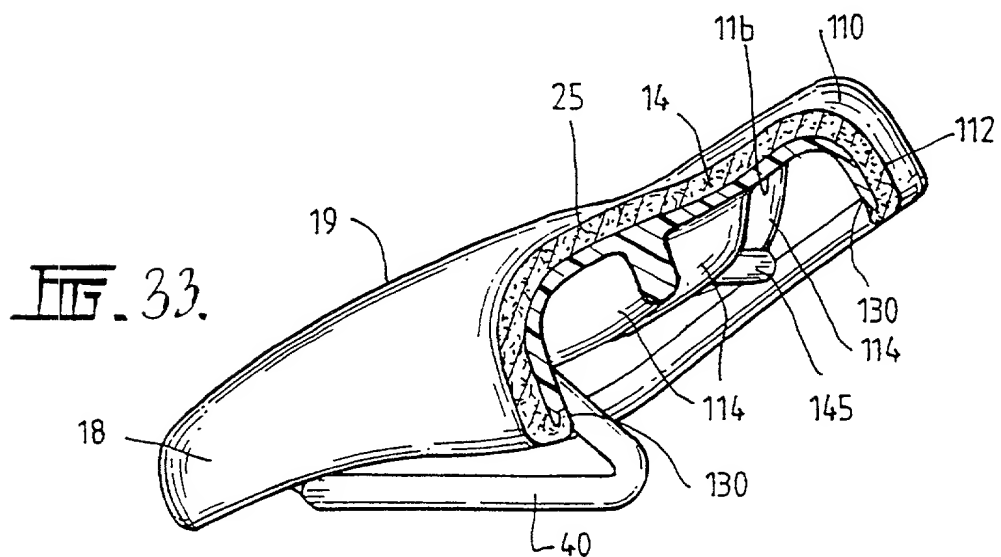

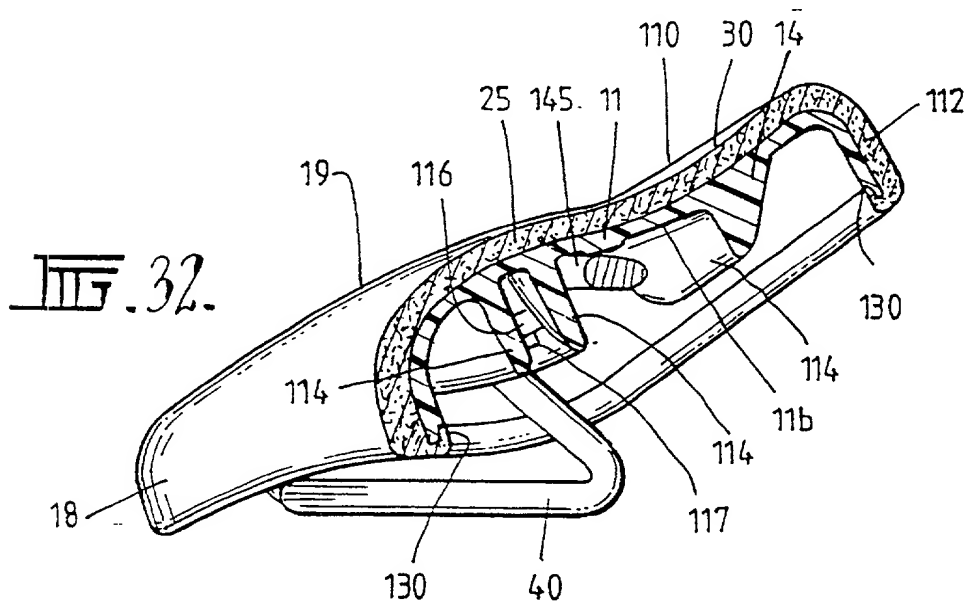

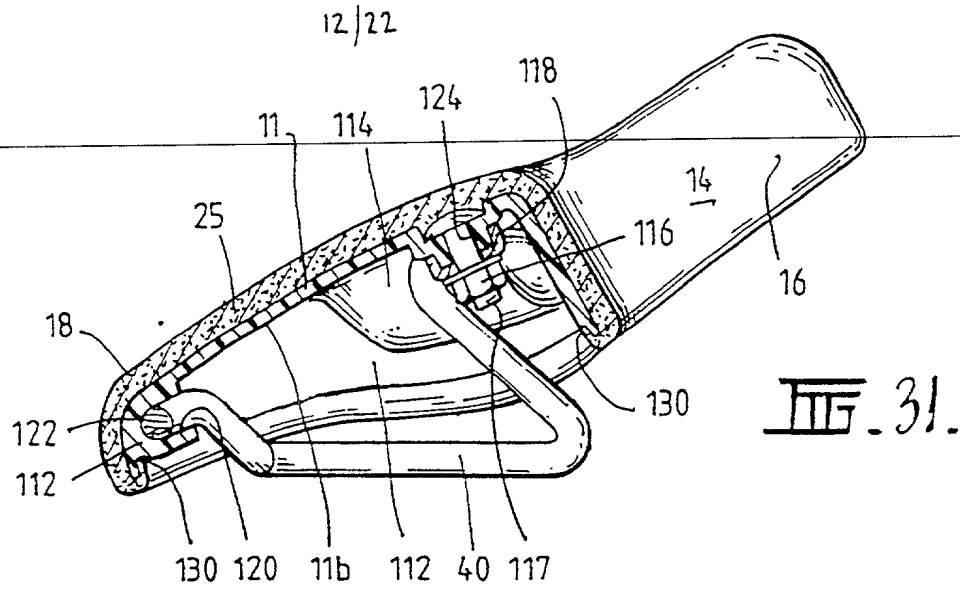

13/22

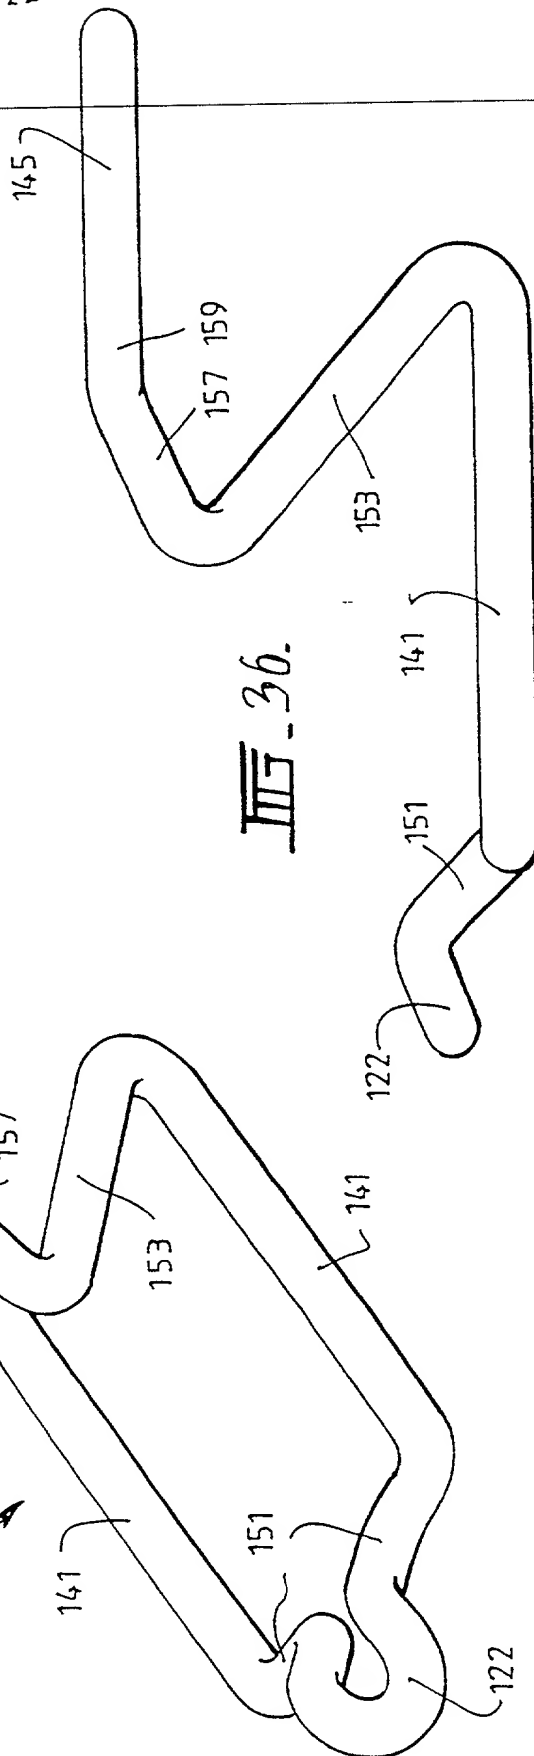
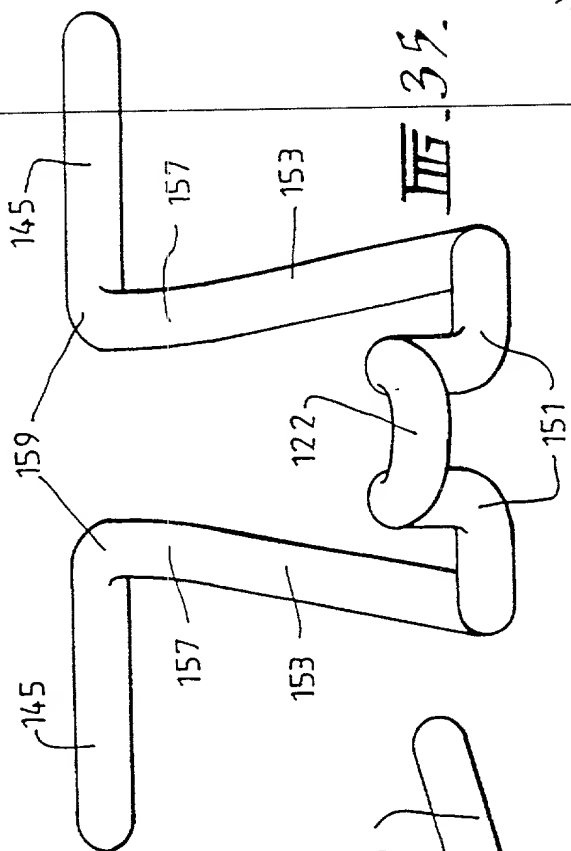


FIG. 37.

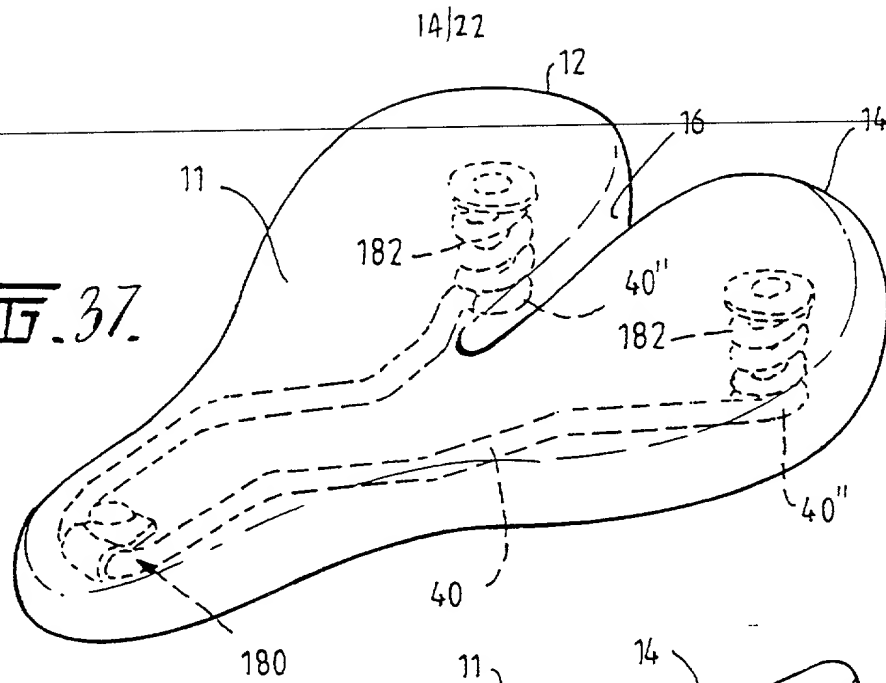


FIG. 38.





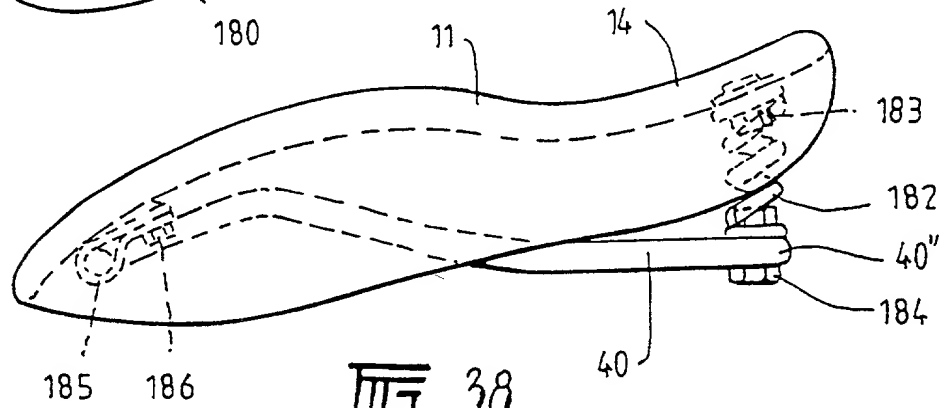





FIG. 39.

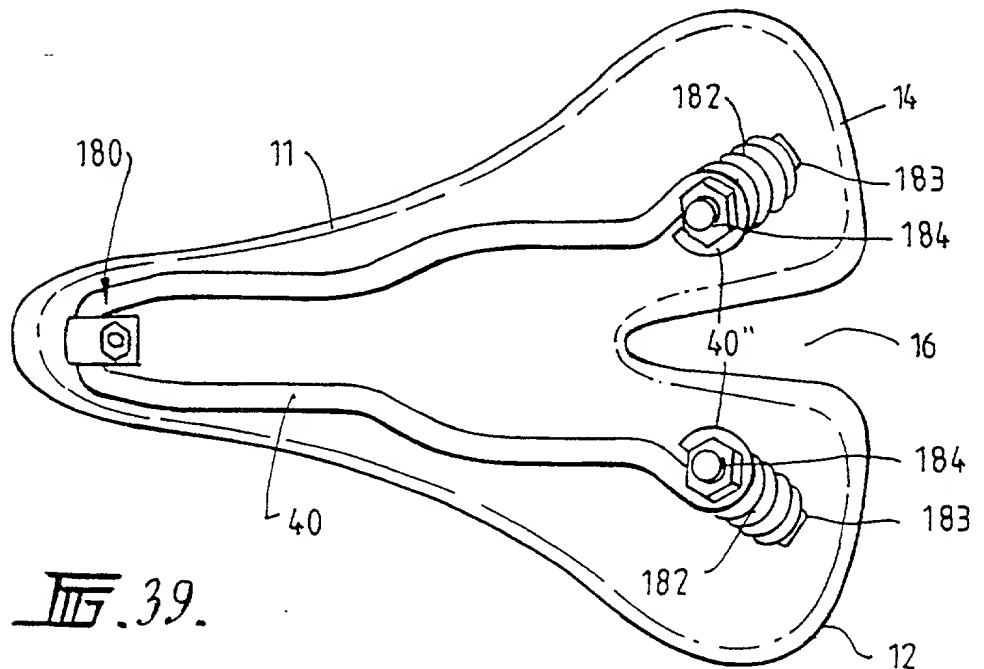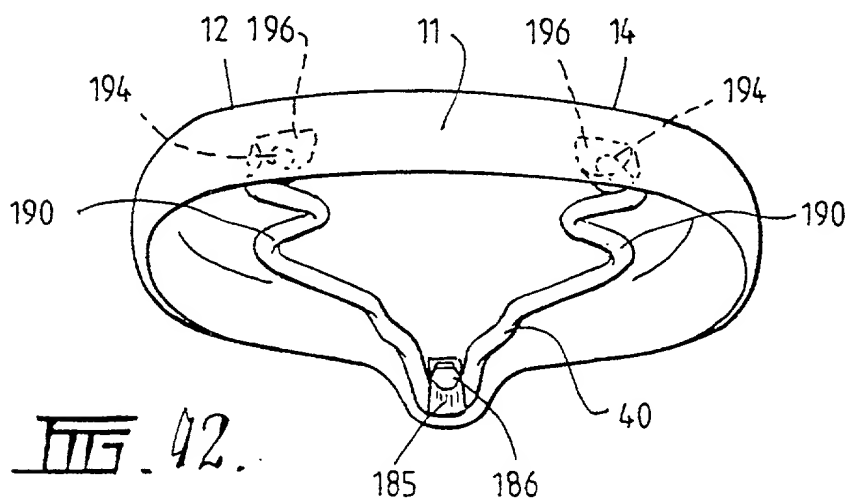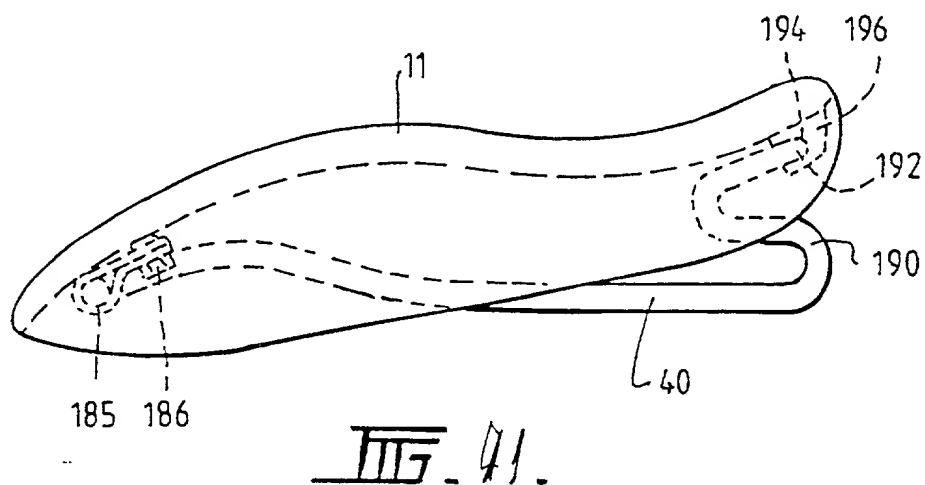

15/22

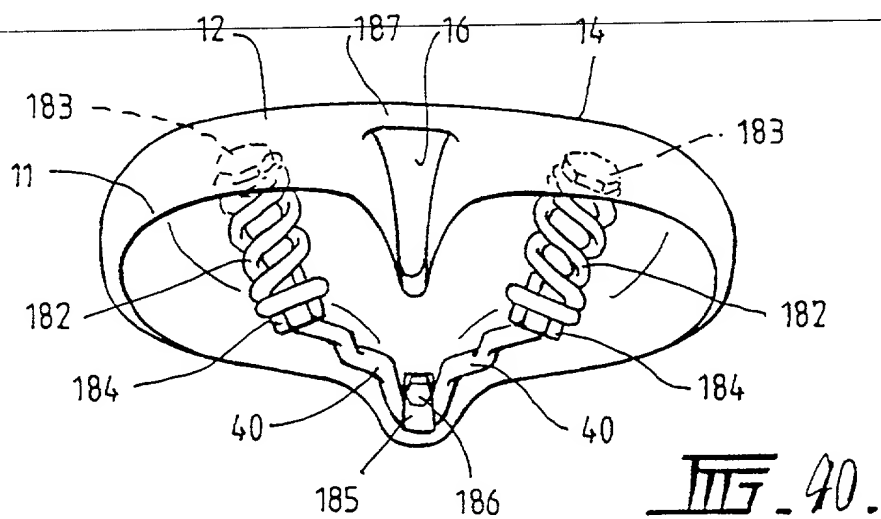

16/22

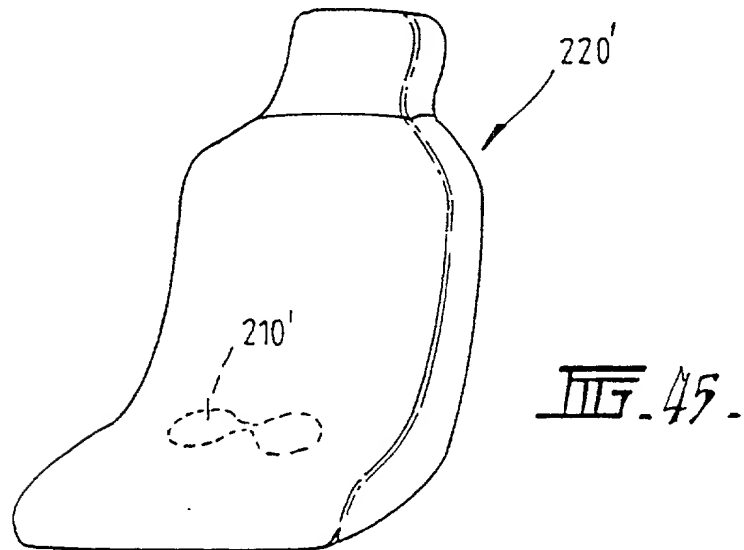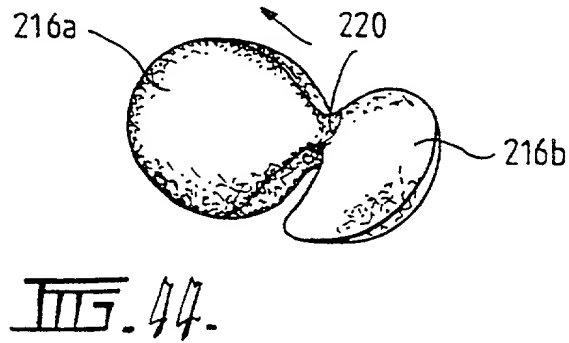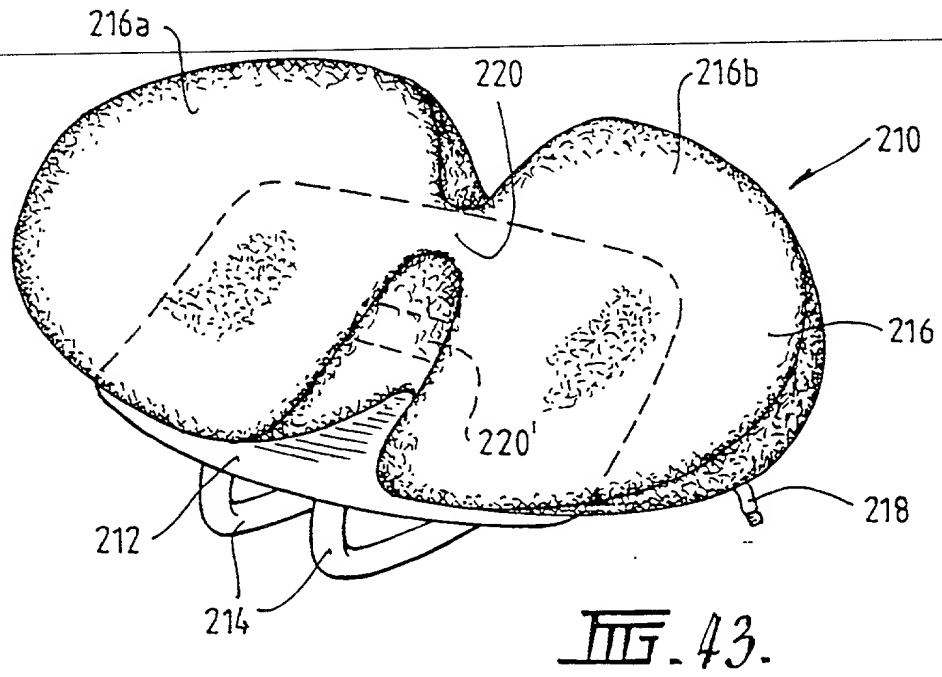

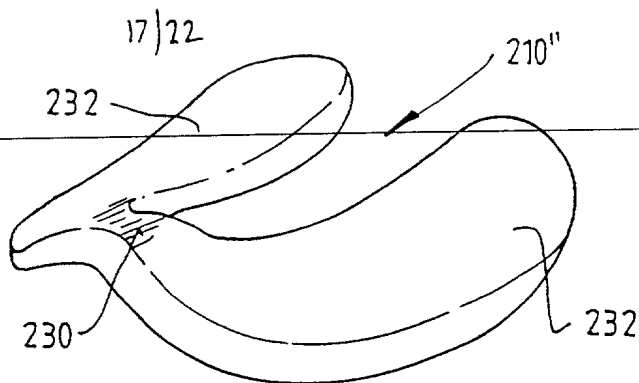


FIG. 46.

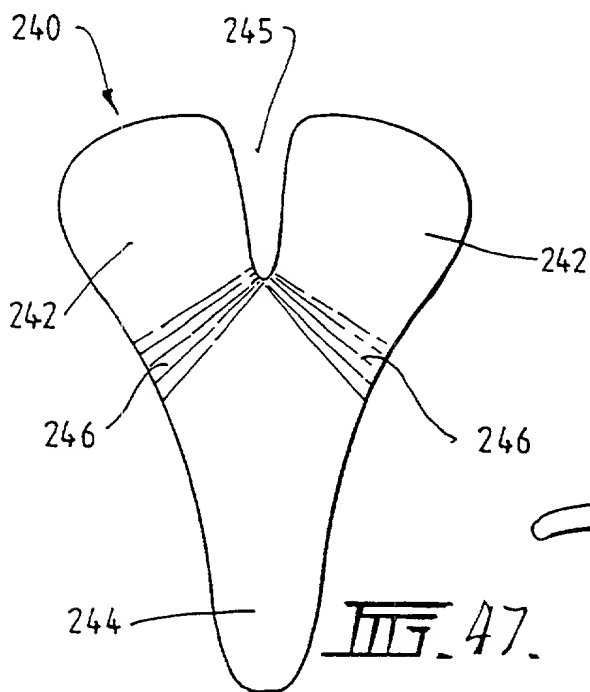


FIG. 47.

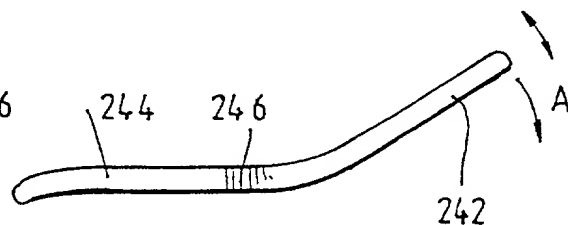


FIG. 48.

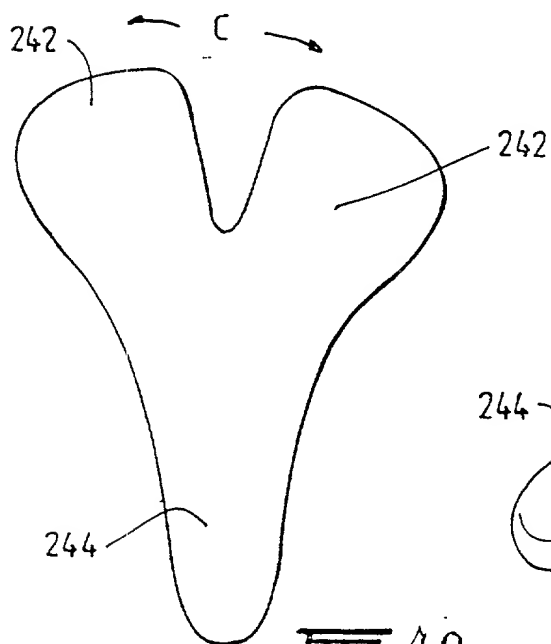


FIG. 49.



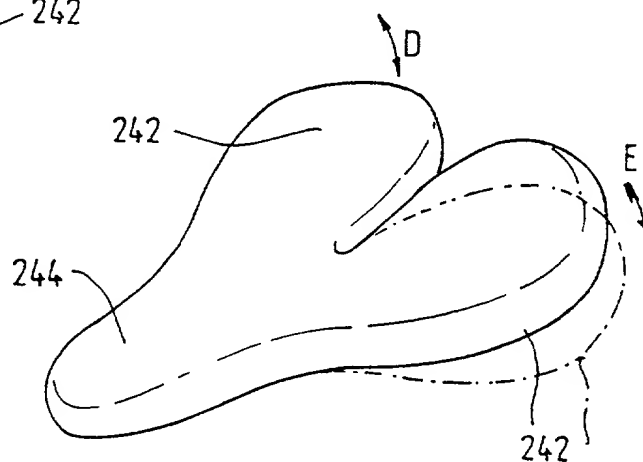


FIG. 50.

18/22

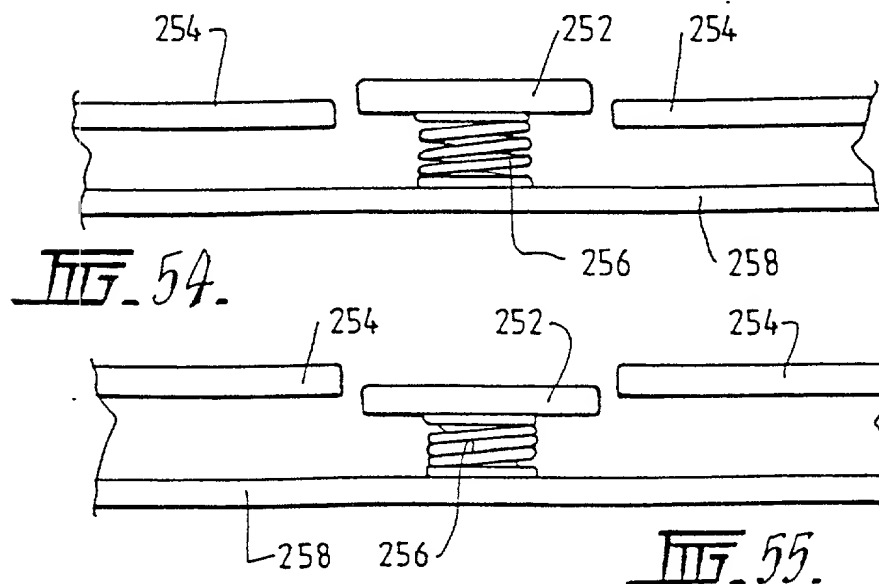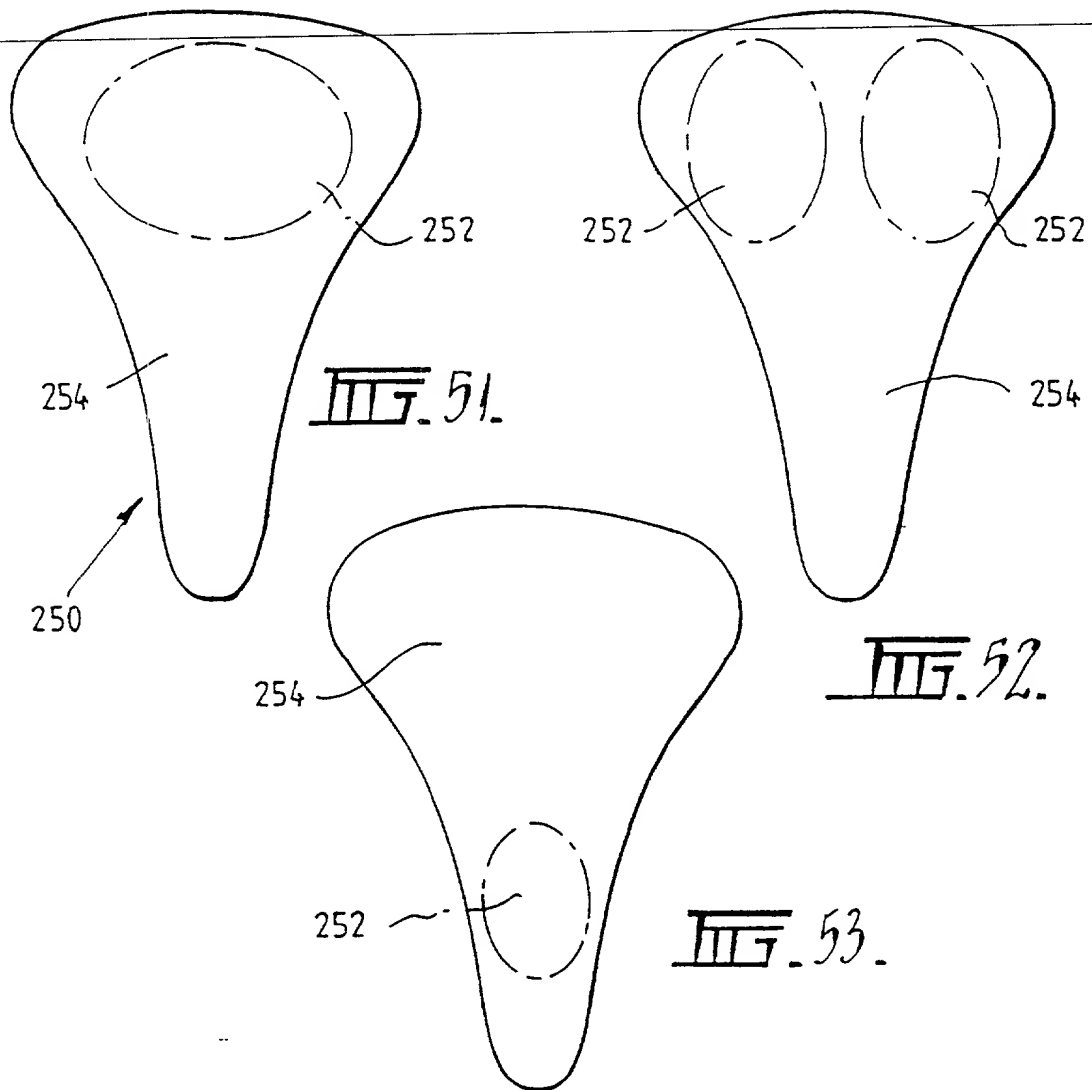

19/12

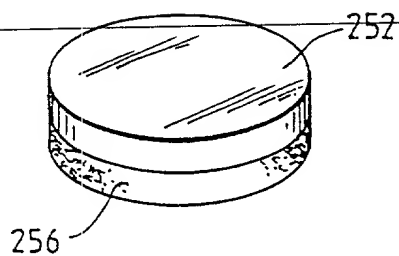


FIG. 56.

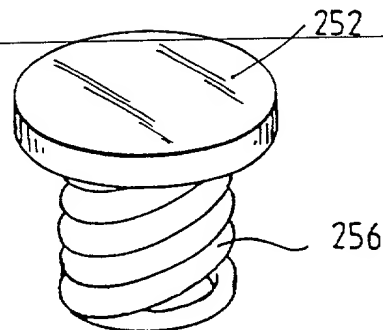


FIG. 57.

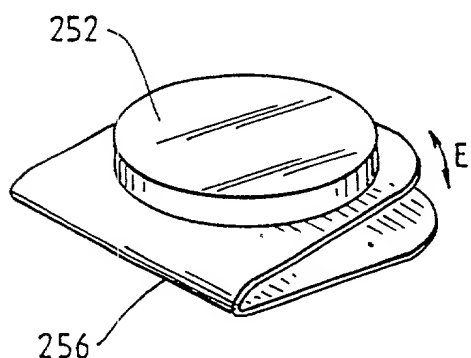


FIG. 58.

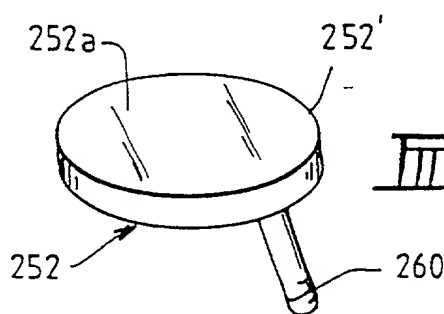


FIG. 59.

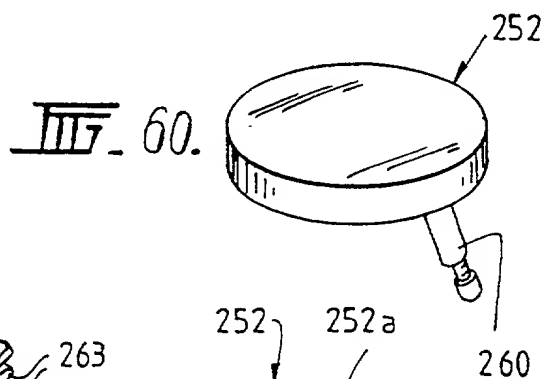


FIG. 60.

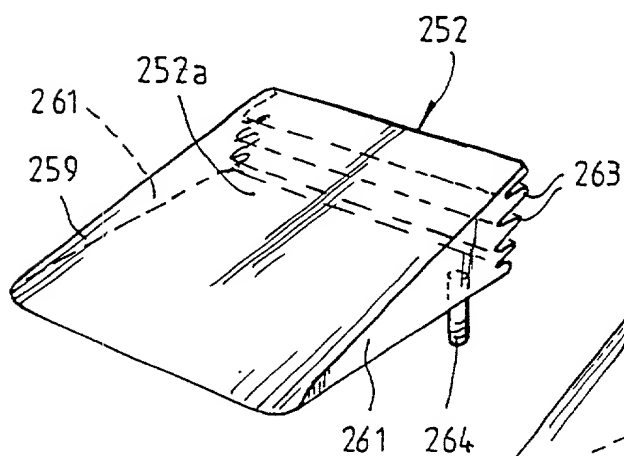


FIG. 61.


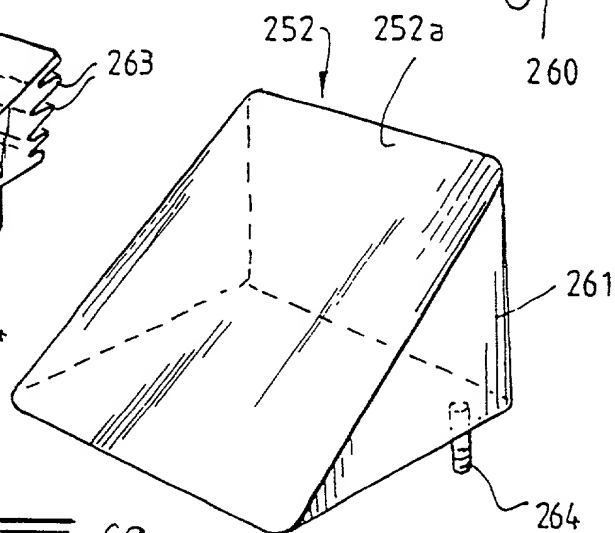


FIG. 62.



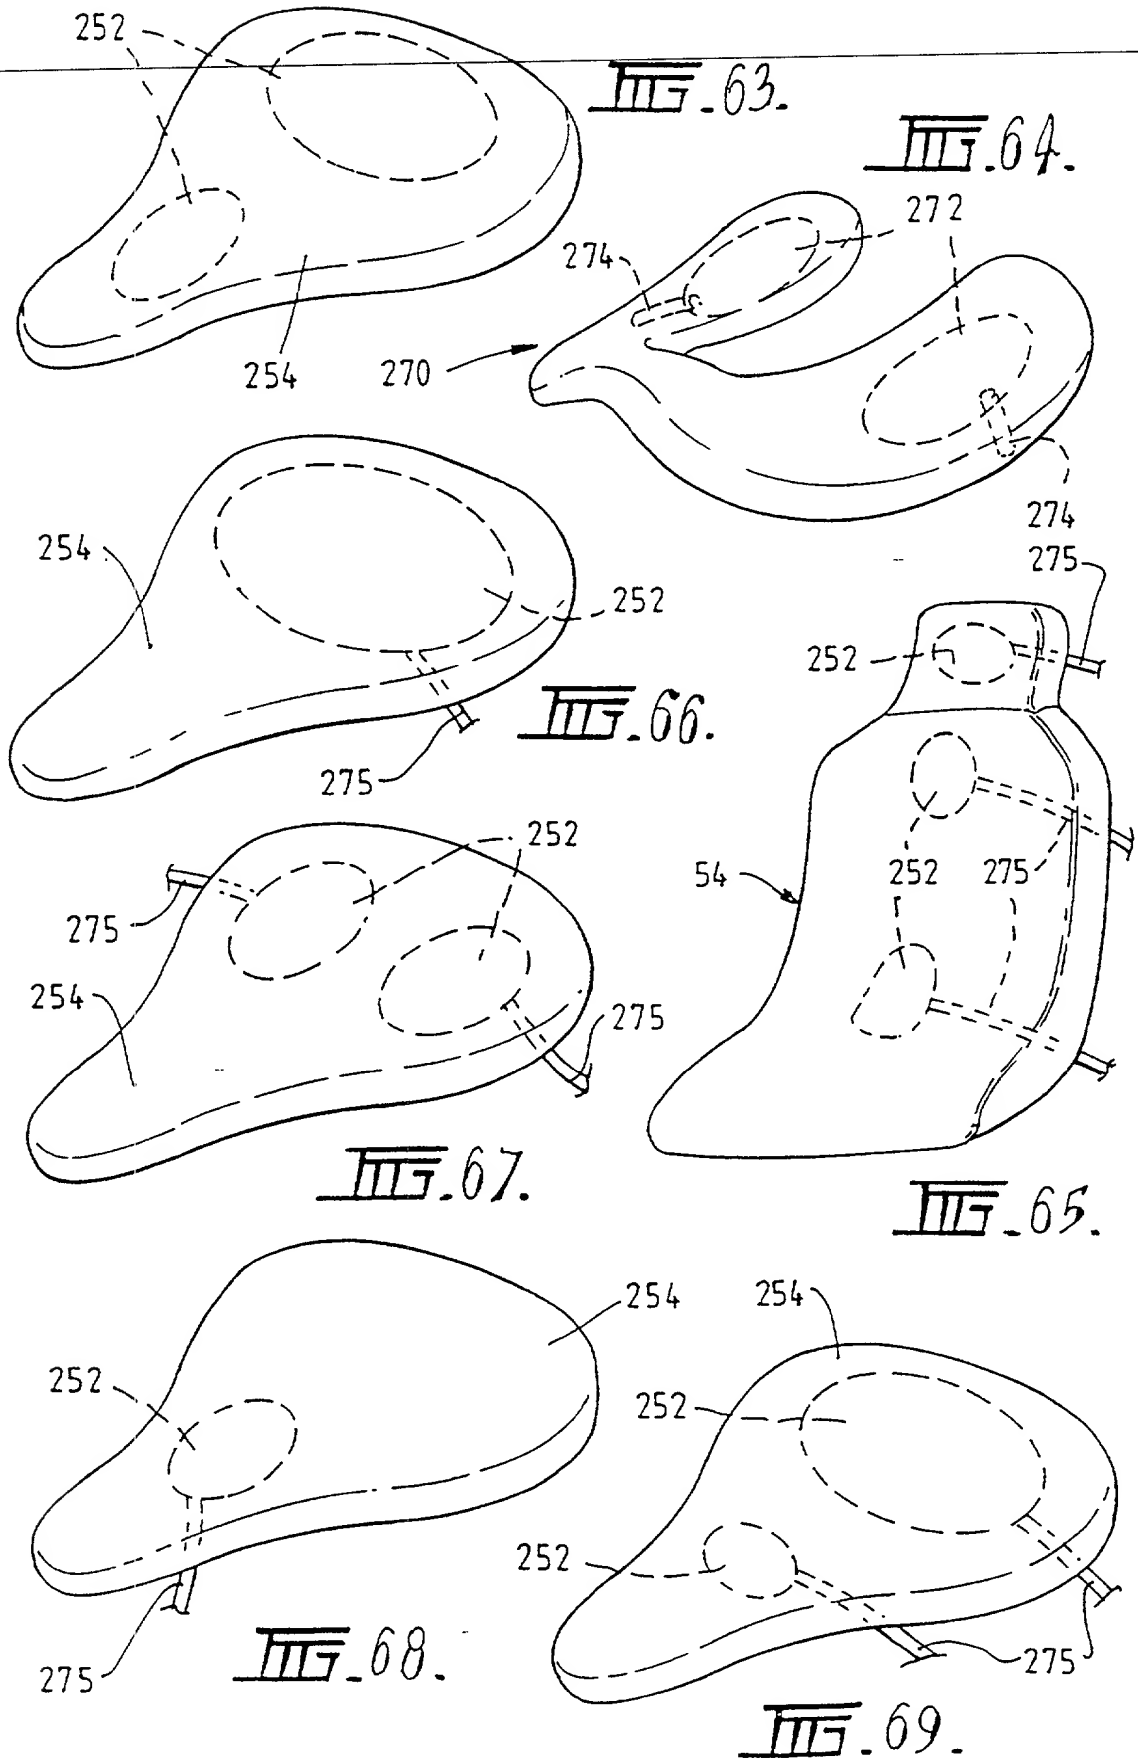

21/22

FIG. 70.

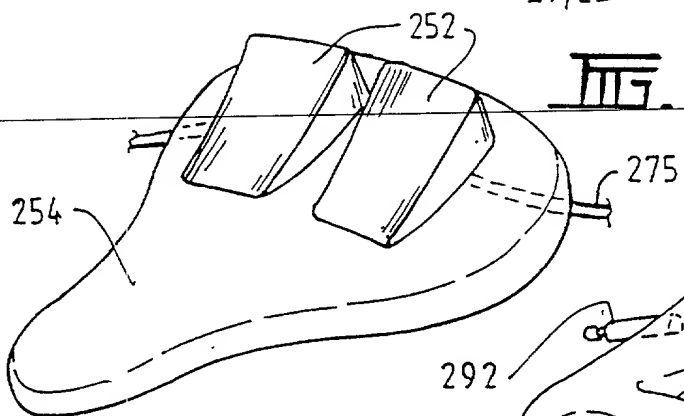


FIG. 76.

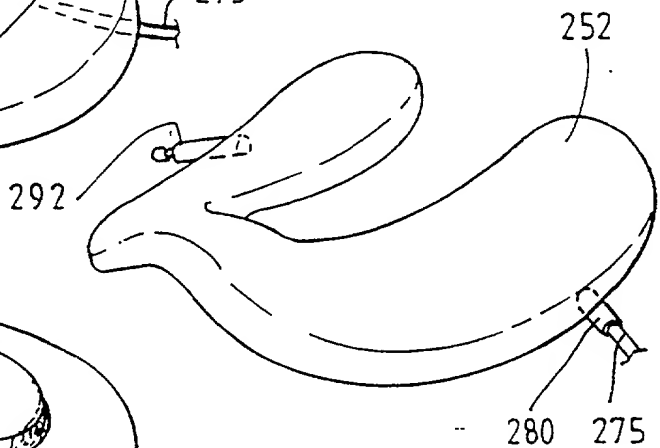


FIG. 71.

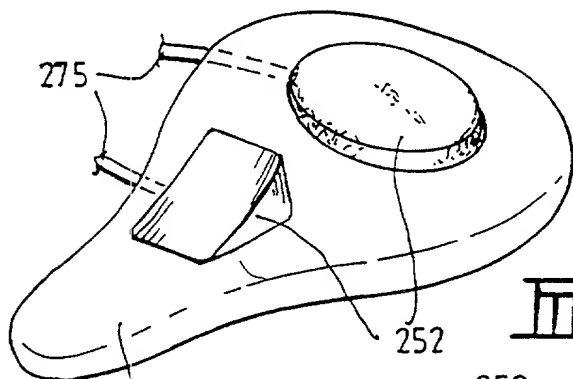


FIG. 73.

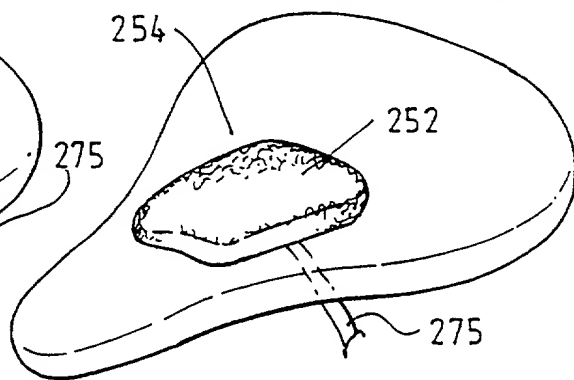


FIG. 72.

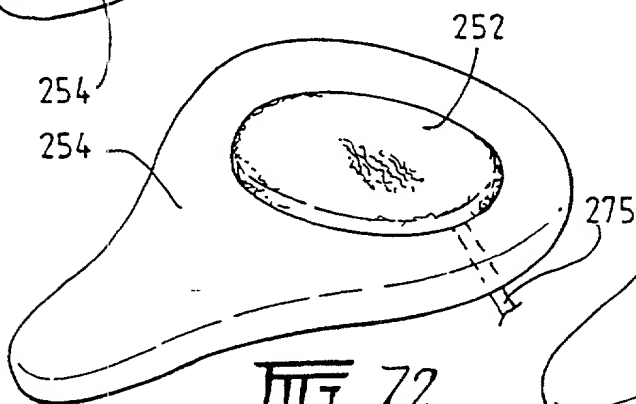


FIG. 74.


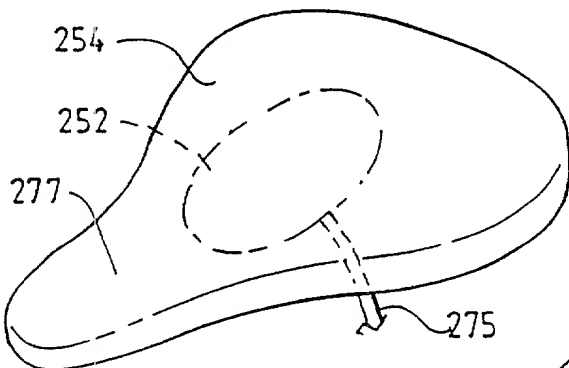


FIG. 75.

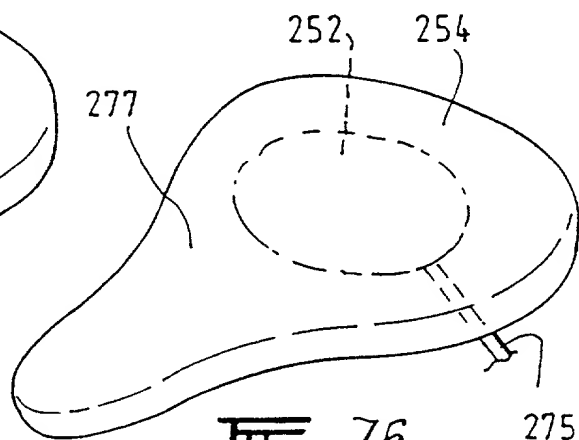

22/22

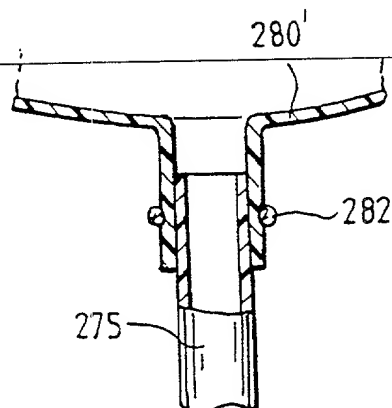


Fig. 77.

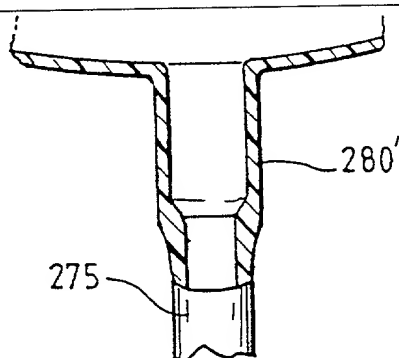


Fig. 78.

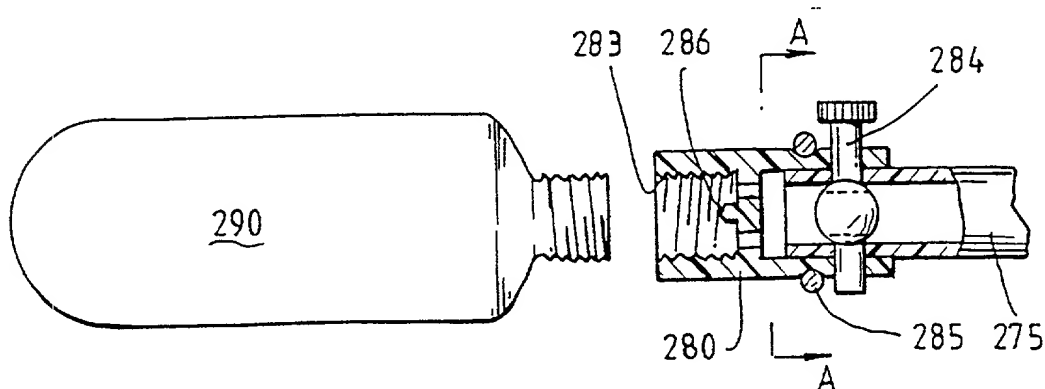


Fig. 79.




Fig. 80.

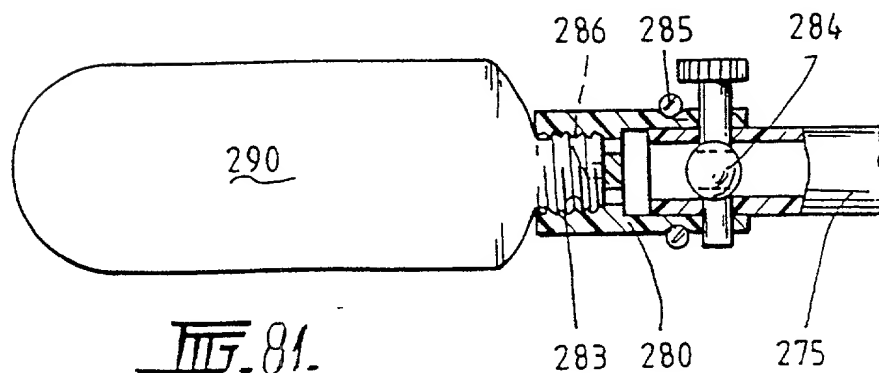


Fig. 81.

ATTORNEY DOCKET NO: \_\_\_\_\_

**COMBINED DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Bicycle Seat

the specification of which

- ☐ is attached hereto.  
☐ was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_  
 and was amended on \_\_\_\_\_.  
☒ was described and claimed in PCT International Application No. PCT/AU97/00818  
 filed on 02/12/97 and as amended under PCT Article 19 on \_\_\_\_\_.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

Country	Serial Number	Filing Date	Priority Claimed?
AU	PO 4055	09/12/96	Yes/ <del>No</del>
AU	PO 5579	12/03/97	Yes/ <del>No</del>
AU	PP 0315	12/11/97	Yes/ <del>No</del>

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose all information I know to be material to patentability as

### COMBINED DECLARATION AND POWER OF ATTORNEY

defined in Title 37, Code of Federal Regulations, §1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Serial Number	Filing Date	Status


3- I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: Paul T. Clark, Reg. No. 30,162, Karen L. Elbing, Reg. No. 35,238, and Kristina Bieker-Brady, Reg. No. 39,109.

Address all telephone calls to: 617/428-0200.

Address all facsimile messages to: 617/428-7045.


Address all correspondence to: Clark & Elbing LLP, 176 Federal Street, Boston, MA 02110.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

Full Name (First, Middle, Last)	Residence Address (City, State, Country)	Post Office Address (Street, City, State, Country)	Citizenship
Paul Damien Nelson	Vic. Australia	Suite 120, 45 Glenferrie Road, Malvern 3144	Australian
Signature: 			Date: 21/5/1999.

Full Name (First, Middle, Last)	Residence Address (City, State, Country)	Post Office Address (Street, City, State, Country)	Citizenship
Signature:			Date:

United States Patent & Trademark Office  
Office of Initial Patent Examination -- Scanning Division

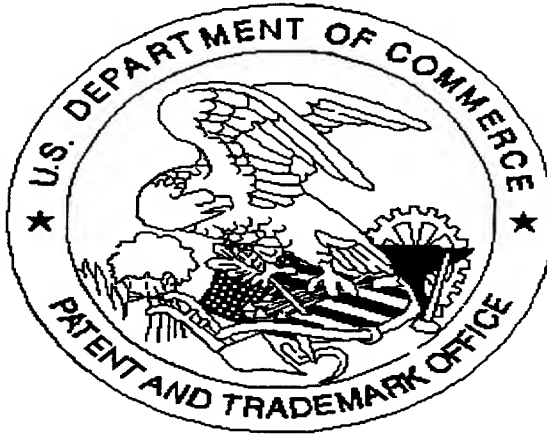

Application deficiencies were found during scanning:

☐ Page(s) 3 of 3 of Declaration were not present  
for scanning. (Document title)

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not present  
for scanning. (Document title)

☐ Scanned copy is best available.

---